



USER GUIDE

Firmware Version: 1.4.x

Last updated on Jul 31, 2025

STRYKER

MOTORCYCLE BLUETOOTH®
HELMET WITH MESH INTERCOM™

———— SOUND BY ————
harman/kardon®



The firmware version 1.4.x indicates that this manual is applicable to all firmware updates within the version 1.4 series.

TABLE OF CONTENTS

1.	ABOUT THE STRYKER	8
1.1	Key Features	8
1.2	General Information	9
1.3	Product Details	10
1.4	Detachable Inner Parts	11
1.5	Package Contents	12
1.6	Ventilation	12
2.	WEARING THE HELMET	13
2.1	Putting on the Helmet	13
2.2	Removing the Helmet	13
2.3	Removing the Shield Visor	14
2.4	Installing the Shield Visor	14
2.5	Removing the Breath Guard	15
2.6	Installing the Breath Guard	15
2.7	Removing the Cheek Pads	16
2.8	Installing the Cheek Pads	16
2.9	Removing the Inner Pad	17
2.10	Installing the Inner Pad	17
2.11	Removing the Inner Sun Visor	18
2.12	Installing the Inner Sun Visor	18
2.13	Pre-Ride Helmet Inspection	18
2.13.1	Checking the Exterior	19
2.13.2	Checking the Chinstrap	19
2.14	Checking the Shield Visor	19

3.	GETTING STARTED	20
3.1	Downloadable Sena Software	20
3.2	Charging	20
3.3	Legend	21
3.4	Powering On and Off	21
3.5	Checking the Battery Level	21
3.6	Volume Adjustment	21
4.	PAIRING THE BLUETOOTH SYSTEM WITH OTHER BLUETOOTH DEVICES	22
4.1	Phone Pairing	22
4.1.1	Initially Pairing the STRYKER	22
4.1.2	Pairing When the STRYKER is Turned Off	23
4.1.3	Pairing When the STRYKER is Turned On	24
4.2	Second Mobile Phone Pairing	24
4.3	Advanced Selective Pairing: Hands-Free or A2DP Stereo	25
4.3.1	Phone Selective Pairing - Hands-Free Profile	25
4.3.2	Media Selective Pairing - A2DP Profile	25
4.4	GPS Pairing	26
5.	MOBILE PHONE USAGE	27
5.1	Making and Answering Calls	27
5.2	Siri and Google Assistant	27
5.3	Speed Dialing	27
5.3.1	Assigning Speed Dial Presets	27
5.3.2	Using Speed Dial Presets	28

6. STEREO MUSIC 29

6.1	Bluetooth Stereo Music	29
6.2	Music Sharing	29
6.2.1	Bluetooth Intercom Music Sharing	30
6.2.2	Mesh Intercom Music Sharing	30

7. MESH INTERCOM 31

7.1	What is Mesh Intercom?	31
7.1.1	Open Mesh	32
7.1.2	Group Mesh	32
7.2	Mesh Version Switch	33
7.3	Starting Mesh Intercom	33
7.4	Using the Mesh in Open Mesh	33
7.4.1	Channel Setting (Default: channel 1)	33
7.5	Using Mesh in Group Mesh	34
7.5.1	Creating a Group Mesh	34
7.5.2	Joining an Existing Group Mesh	35
7.6	Enable/Disable Mic (Default: Enable)	36
7.7	Toggling Open Mesh/Group Mesh	36
7.8	Mesh Reach-Out Request	37
7.9	Reset Mesh	37

8. WAVE INTERCOM 38

8.1	Starting Wave Intercom	38
8.2	Switching between Wave Intercom and Mesh Intercom	38

9.	BLUETOOTH INTERCOM	39
9.1	Intercom Pairing	39
9.1.1	Using the Smart Intercom Pairing (SIP)	39
9.1.2	Using the Button	40
9.2	Last-Come, First-Served	41
9.3	Two-Way Intercom	42
9.4	Multi-Way Intercom	43
9.4.1	Starting a Three-Way Intercom Conference	43
9.4.2	Starting a Four-Way Intercom Conference	44
9.4.3	Ending Multi-Way Intercom	44
9.5	Three-Way Conference Phone Call with Intercom Users	45
9.6	Group Intercom	46
9.7	Mesh Intercom Conference with Bluetooth Intercom Participant	46
10.	UNIVERSAL INTERCOM	48
10.1	Universal Intercom Pairing	48
10.2	Two-Way Universal Intercom	48
10.3	Multi-Way Universal Intercom	49
10.3.1	Three-Way Universal Intercom	49
10.3.2	Four-Way Universal Intercom	50
10.4	Mesh Intercom Conference with Two-way Universal Intercom Participant	51
11.	USING THE FM RADIO	52
11.1	FM Radio On/Off	52
11.2	Seek and Save Radio Stations	52
11.3	Scan and Save Radio Stations	53

11.4	Temporary Station Preset	53
11.5	Navigating Preset Stations	54
12. LED TAILLIGHT		55
13. VOICE COMMAND		56
14. FUNCTION PRIORITY		58
15. FIRMWARE UPGRADES		59
15.1	Wi-Fi-Enabled for Automatic Firmware Update	59
15.1.1	Connecting to the Bluetooth System	59
15.1.2	Connection Setup	60
15.1.3	LED Description	60
15.1.4	Wi-Fi Reset	61
16. CONFIGURATION SETTING		62
16.1	Bluetooth System Configuration Menu	62
16.1.1	Delete All Pairings	63
16.1.2	Remote Control Pairing	63
16.2	Software Configuration Setting	63
16.2.1	Language	63
16.2.2	Mesh Reach-Out (Default: Disable)	63
16.2.3	Equalizer (Default: Music Balance)	64
16.2.4	Audio Boost (Default: Enable)	64
16.2.5	VOX Phone (Default: Enable)	64
16.2.6	VOX Intercom (Default: Disable)	64
16.2.7	VOX Sensitivity (Default: 3)	65
16.2.8	HD Intercom (Default: Enable)	65
16.2.9	HD Voice (Default: Enable)	65

16.2.10	Bluetooth Intercom Audio Multitasking (Default: Disabled)	66
16.2.11	Intercom-Audio Overlay Sensitivity (Default: 3)	66
16.2.12	Audio Overlay Volume Management (Default: Disable)	66
16.2.13	Smart Volume Control (Default: Disable)	67
16.2.14	Sidetone (Default: Disable)	67
16.2.15	Voice Assistant (Default: Enable)	67
16.2.16	Voice Prompt (Default: Enable)	67
16.2.17	RDS AF Setting (Default: Disable)	67
16.2.18	FM Station Guide (Default: Enable)	67
16.2.19	Advanced Noise Control™ (Default: Enable)	68
16.2.20	Region Selection	68

17. TROUBLESHOOTING	69
----------------------------	-----------

17.1	Fault Reset	69
17.2	Factory Reset	69

18. MAINTENANCE AND CARE	70
---------------------------------	-----------

18.1	Outer Shell	70
18.2	Inner Lining	70
18.3	Storing the Helmet	70

1. ABOUT THE STRYKER

1.1 Key Features

- Mesh Intercom 3.0 - delivers improved sound quality, a more robust connection, and extended talk time
- Dual version Mesh - Mesh 2.0 for backward compatibility
- Wave Intercom™ Compatible
- Audio Multitasking™
- Multi-Language Voice Command
- Support Siri and Google Assistant
- Wi-Fi-Enabled for Automatic Firmware Updates
- Bluetooth® 5.0

1.2 General Information




This product is a Motorcycle Sports Touring Full-Face Helmet.


Do not use it for any other purpose than riding a motorcycle. If you use the helmet for anything else, it may not provide sufficient protection in an accident. No helmet can protect the wearer against all possible impact scenarios.

For maximum protection, the helmet must fit properly on the head and its retention strap securely fastened under the chin. With the retention system comfortably but firmly adjusted, the helmet should allow sufficient peripheral vision when secured. If the helmet is too large, it may move on your head while riding. If the helmet can be removed when pulled from the back in an upward and forward direction, it's not fitted properly. This could cause the helmet to obstruct your vision while riding or come off in an accident, resulting in personal injury or death. Please refer to **Section 2: "Wearing the Helmet"** for more details about properly securing and wearing your helmet.


The contents of this helmet User's Guide are subjected to change without notice. Its illustration may differ from the actual product. The copyrights for the User's Guide belong to Sena Technologies Co., Ltd. Reproduction or copying of the User's Guide without permission is strictly prohibited.

1.3 Product Details

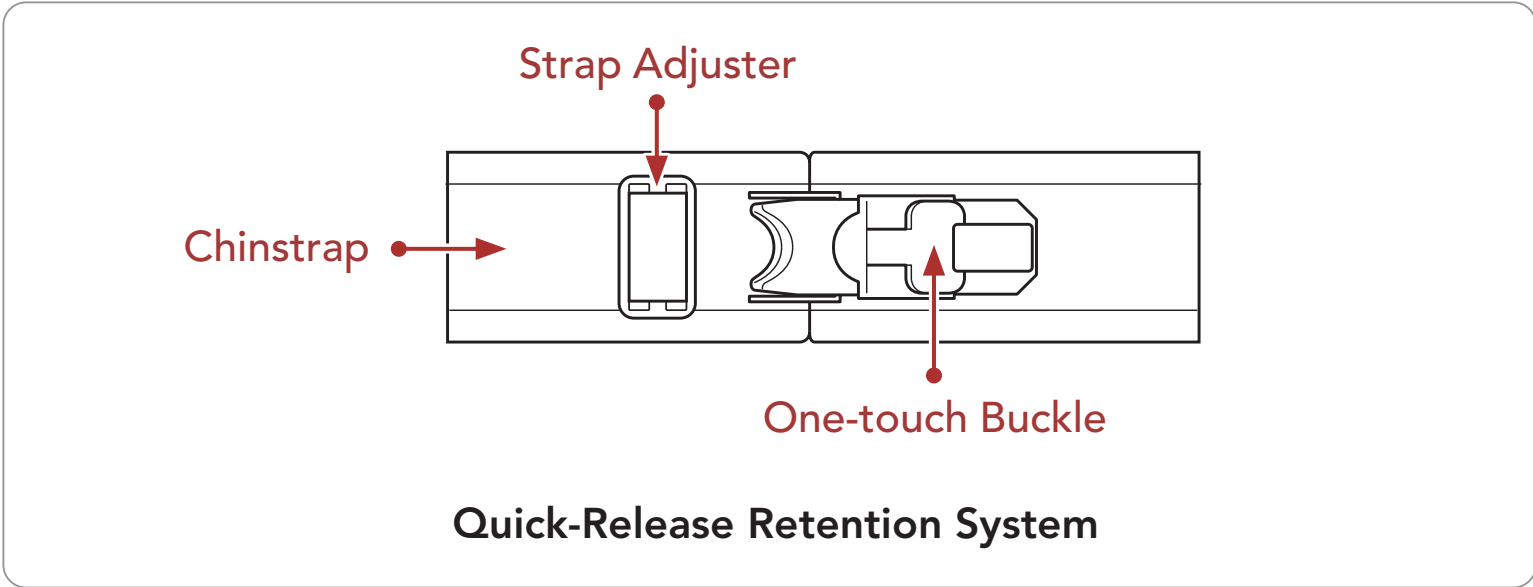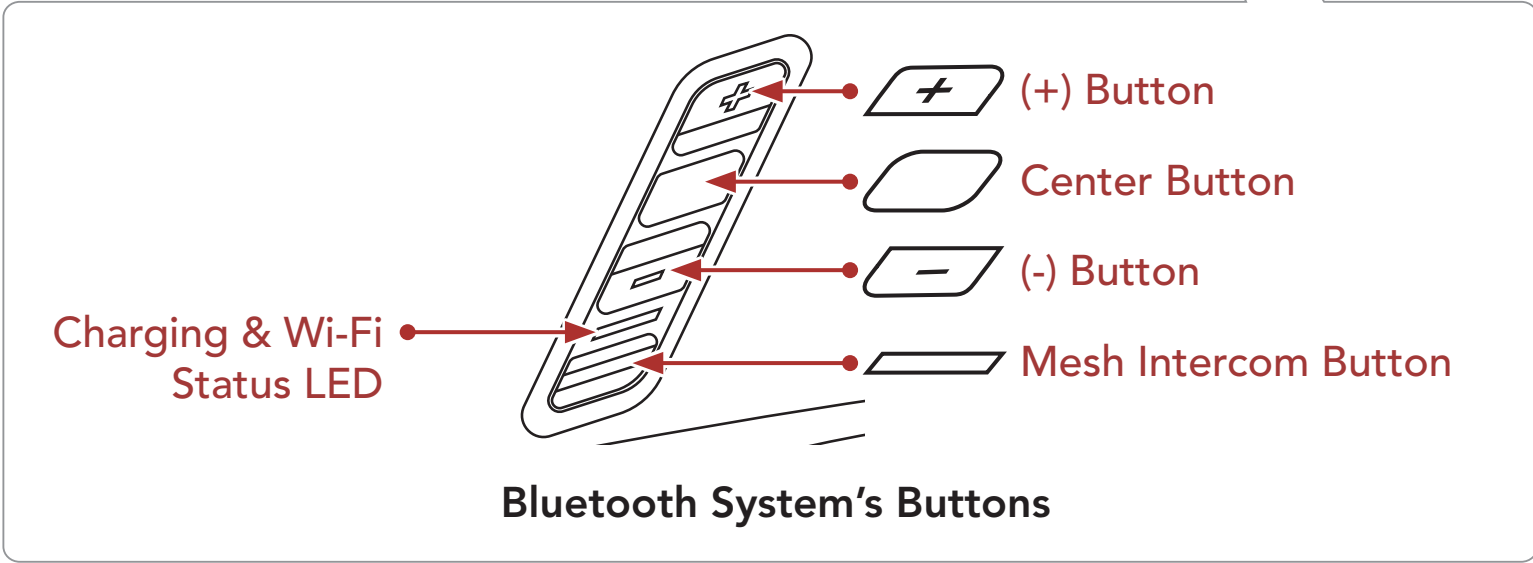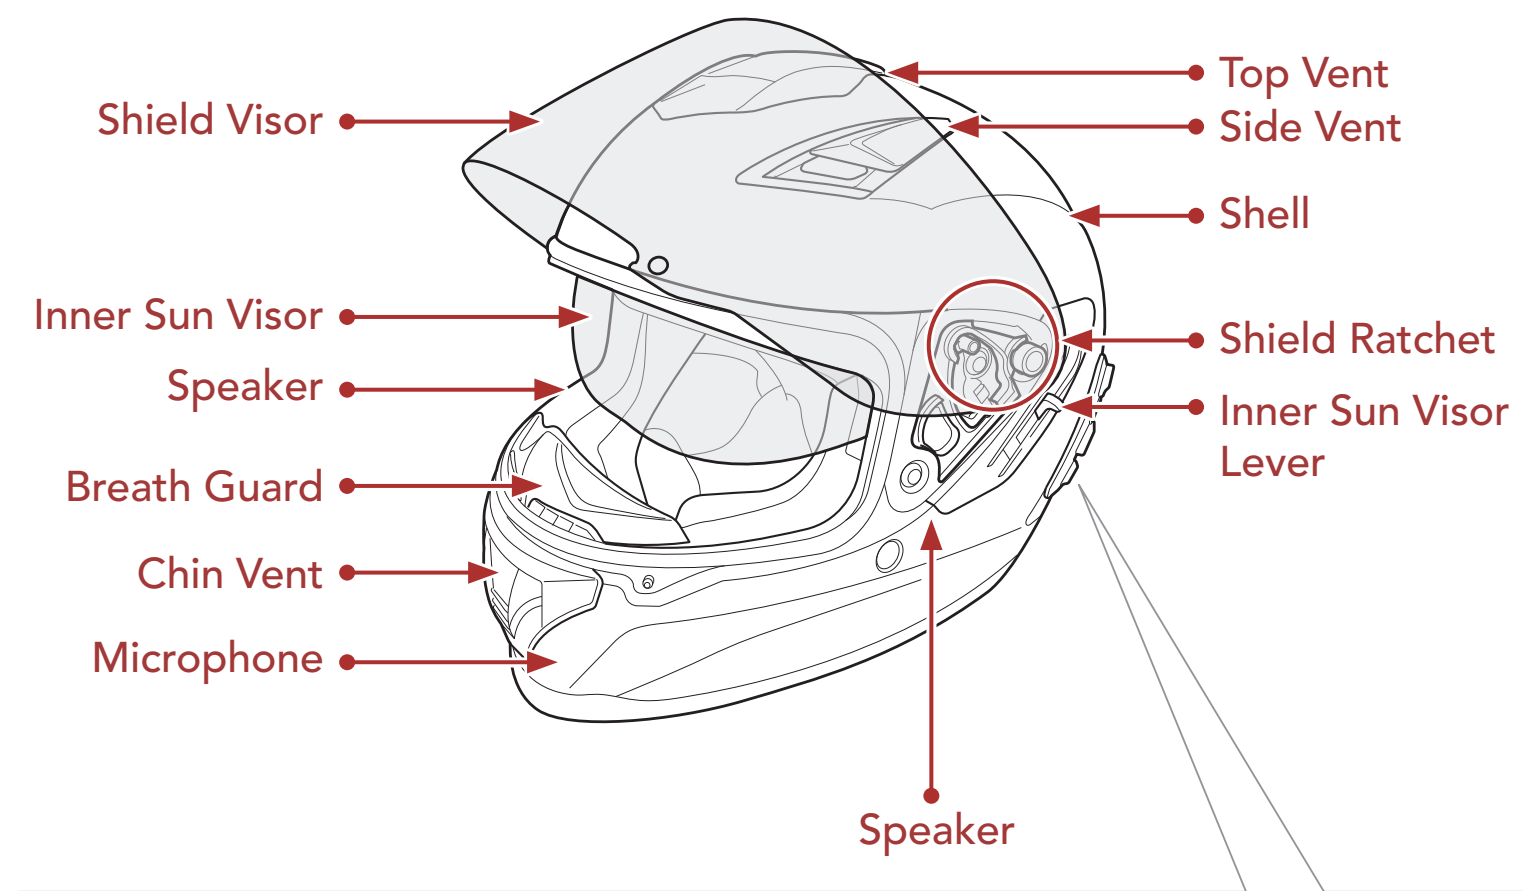

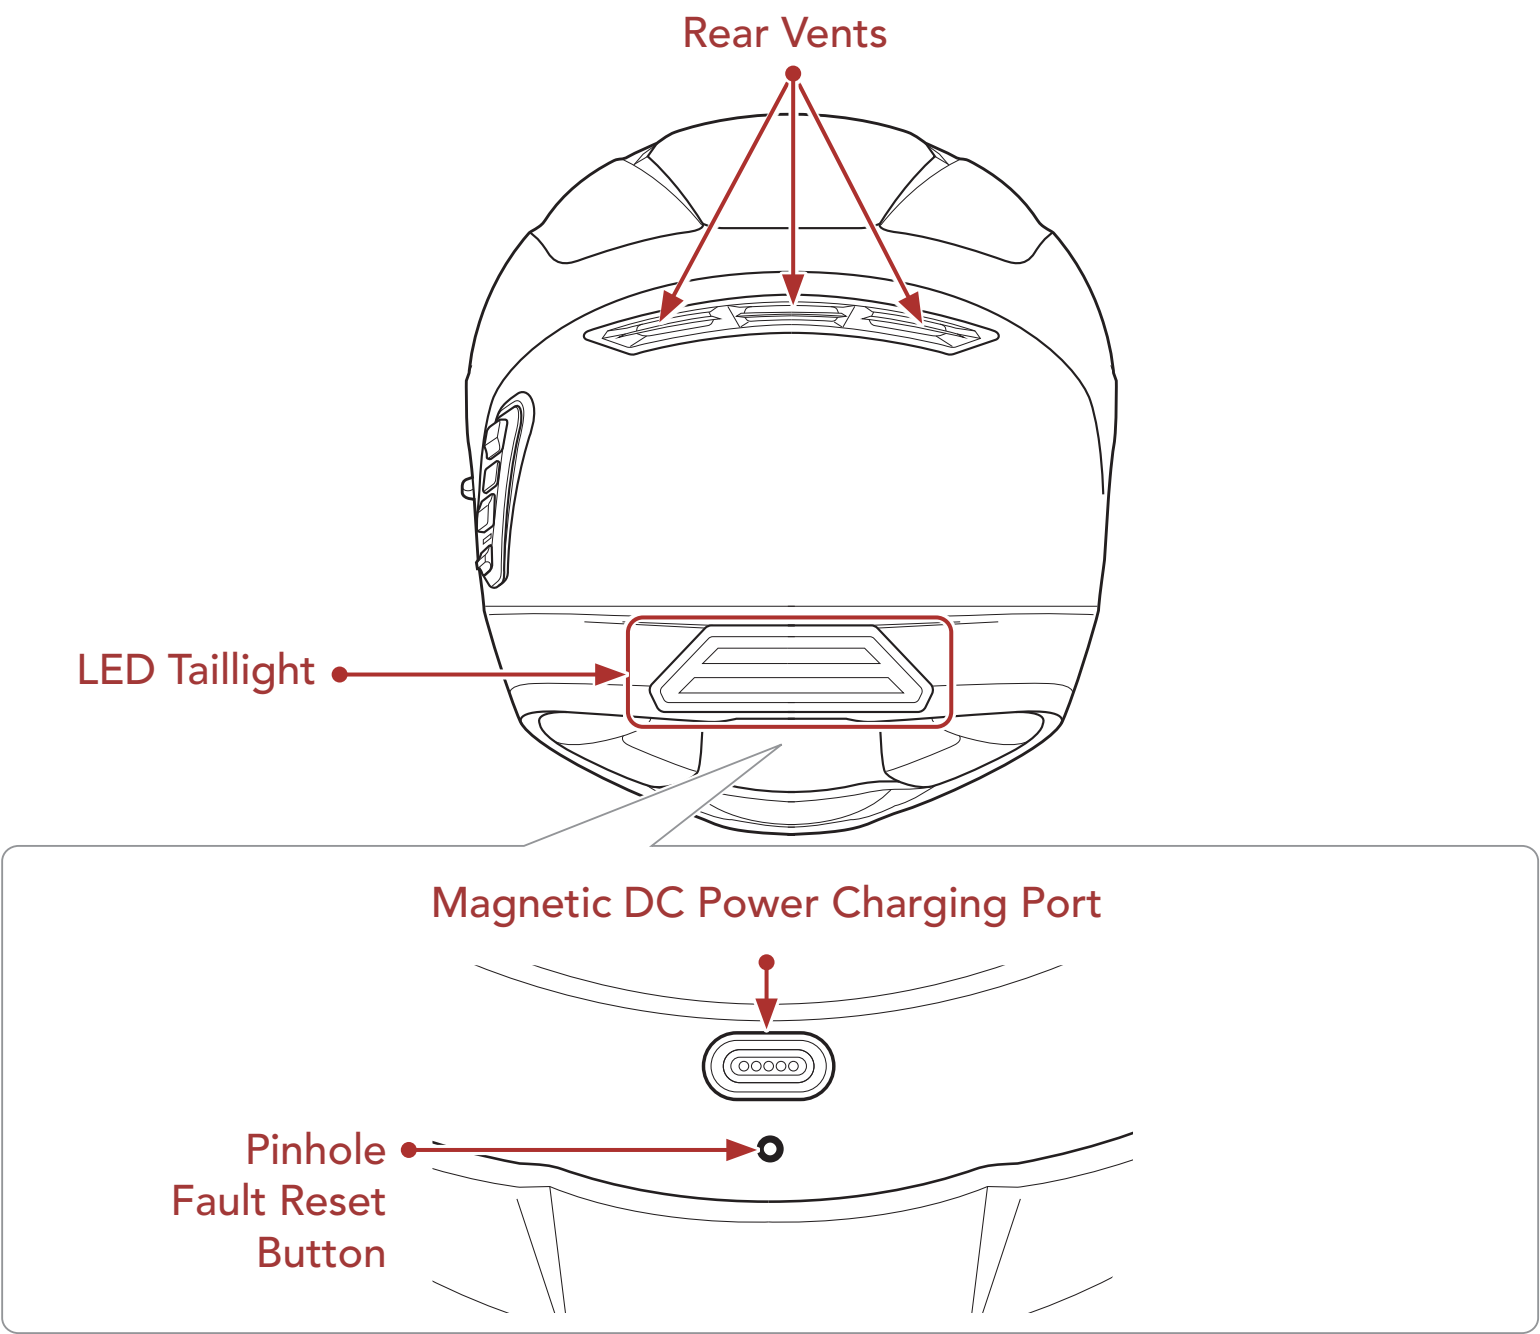

1.4 Detachable Inner Parts

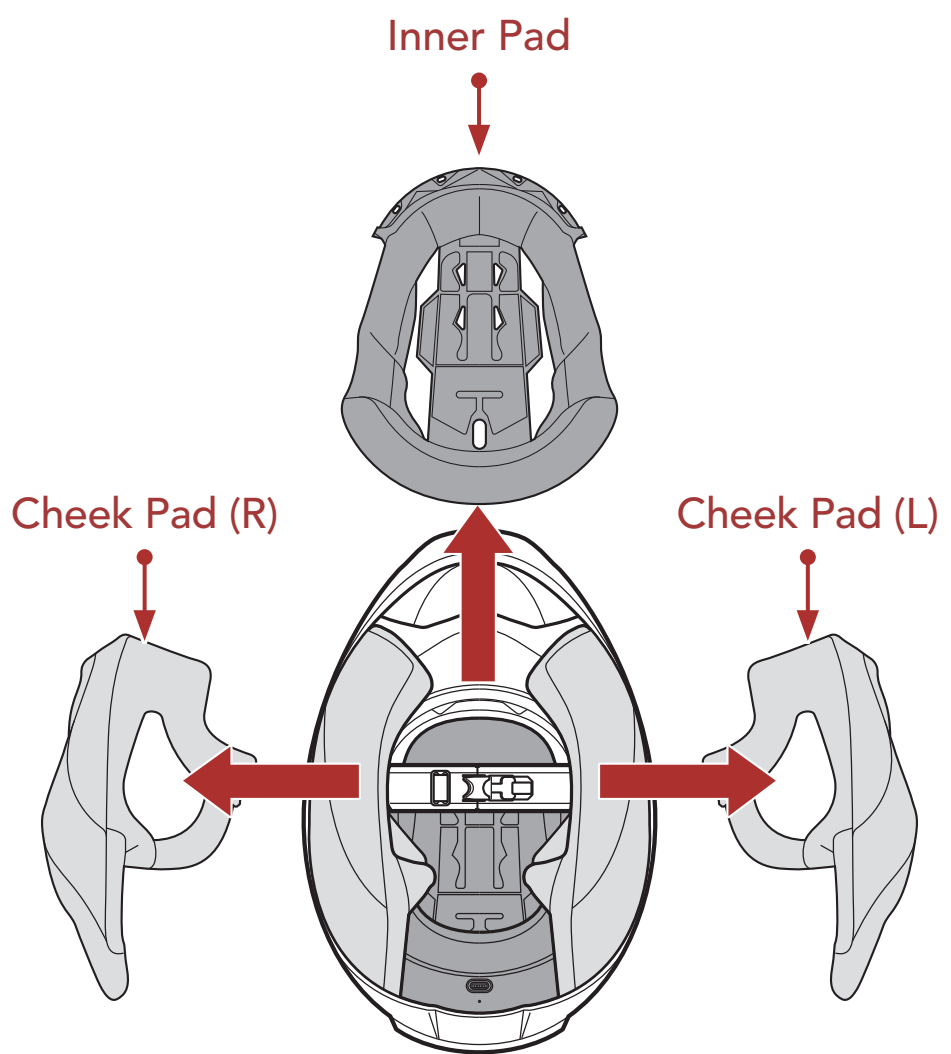


1.5 Package Contents




STRYKER Helmet




Helmet Pouch



Reflex Stickers (4)*



USB Power & Data Cable
(Magnetic USB-C)




Magnetic
USB-C Adapter


* Included only in Europe package

1.6 Ventilation

Top & Side Ventilation:

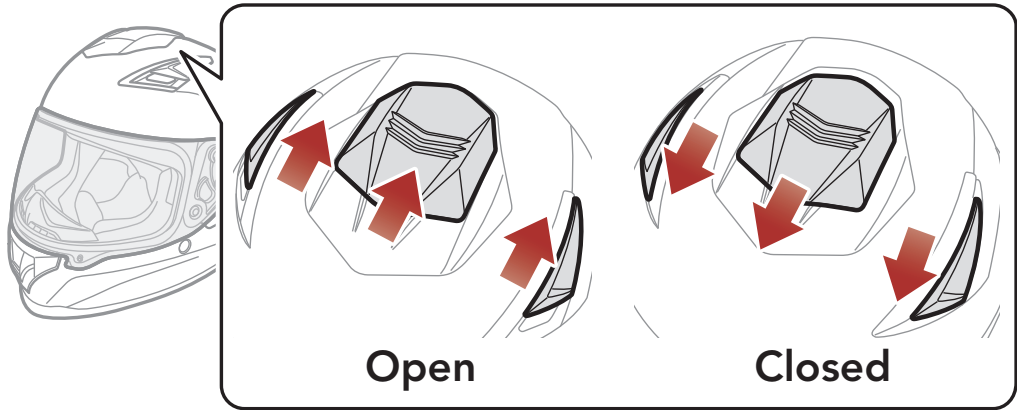

Chin Ventilation:

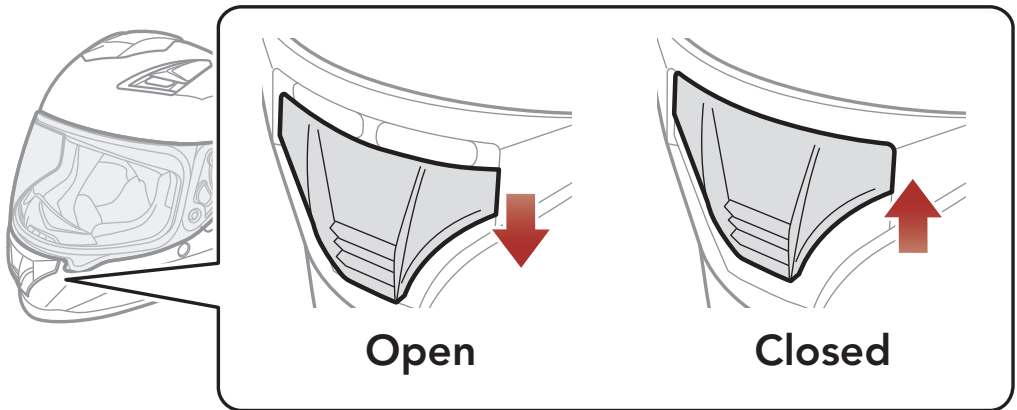

2. WEARING THE HELMET

2.1 Putting on the Helmet


1. Unfasten the chinstrap by using the retention system.
2. Expand the helmet opening with your hand, and slide your head into the helmet.
3. Fasten the chinstrap as tight as possible without causing you pain.

2.2 Removing the Helmet


1. Unfasten the chinstrap by using the retention system.
2. Gently pull the padded chinstrap outward and slide the helmet off your head.

Note: Fastening the chinstrap after removing the helmet will help avoid scratching surfaces it's placed upon.

Quick-release retention system

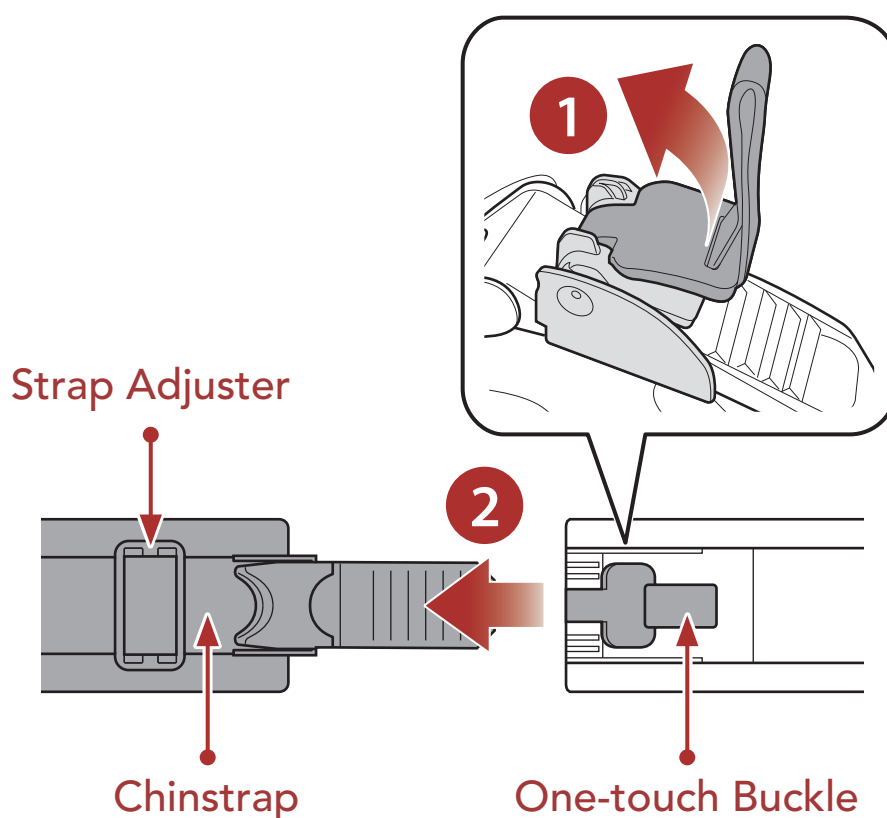


2.3 Removing the Shield Visor

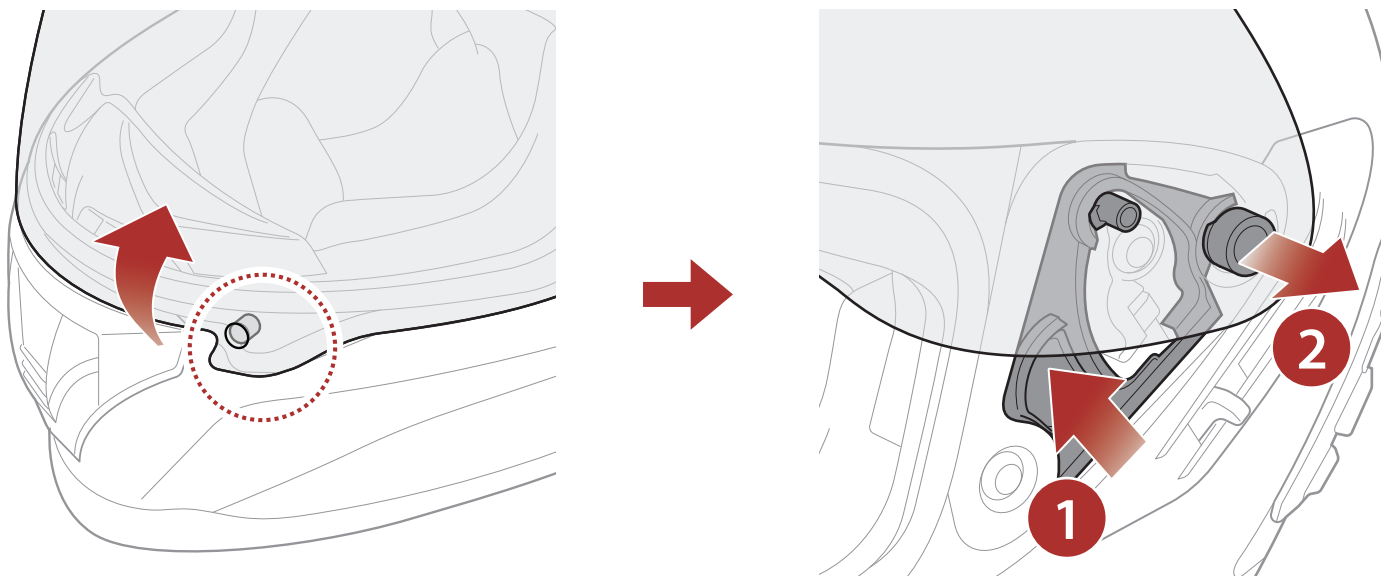


1. Unlatch the tab located on the left side of the shield visor to detach it from the hook.
2. Open the shield visor to the fully opened position.
3. Pull the shield visor outward while pushing the shield ratchet lever upward.
4. Repeat Step 3 on the opposite side.

2.4 Installing the Shield Visor

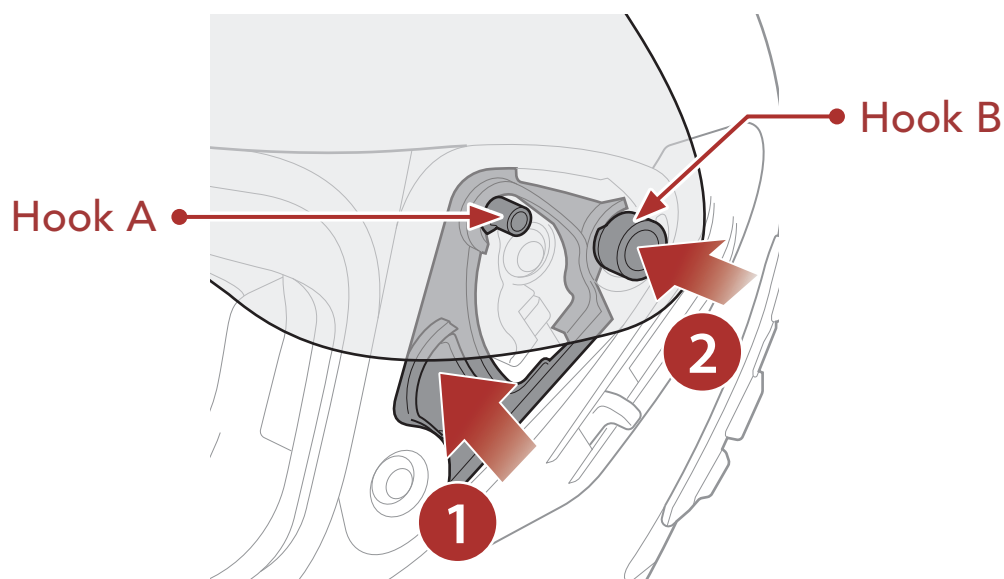


1. Align hooks A and B to the shield ratchet as shown in the illustration above.
2. Insert hooks A and B into the shield ratchet while pushing the shield ratchet lever upward.
3. Release the shield ratchet lever to lock the shield visor into place.
4. Repeat the process on the opposite side.

2.5 Removing the Breath Guard

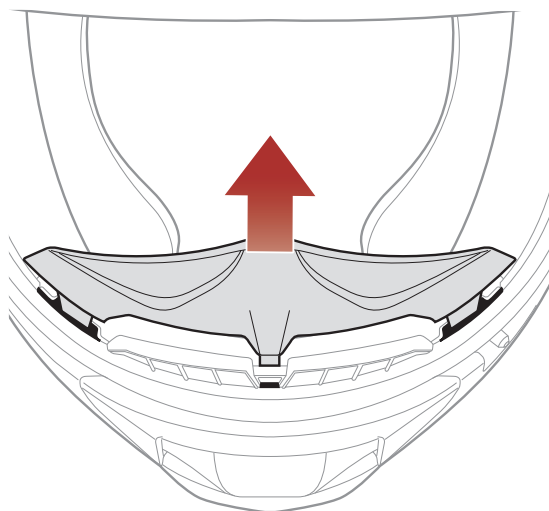


Pull the breath guard away from the chin guard until it separates completely.

2.6 Installing the Breath Guard

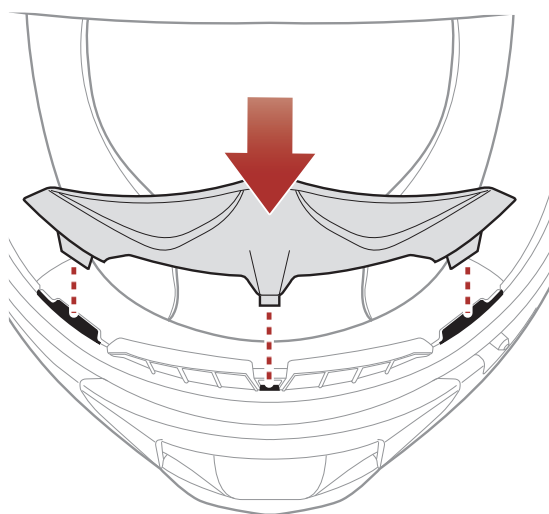


Insert the three tabs of the breath guard into the slots.

2.7 Removing the Cheek Pads

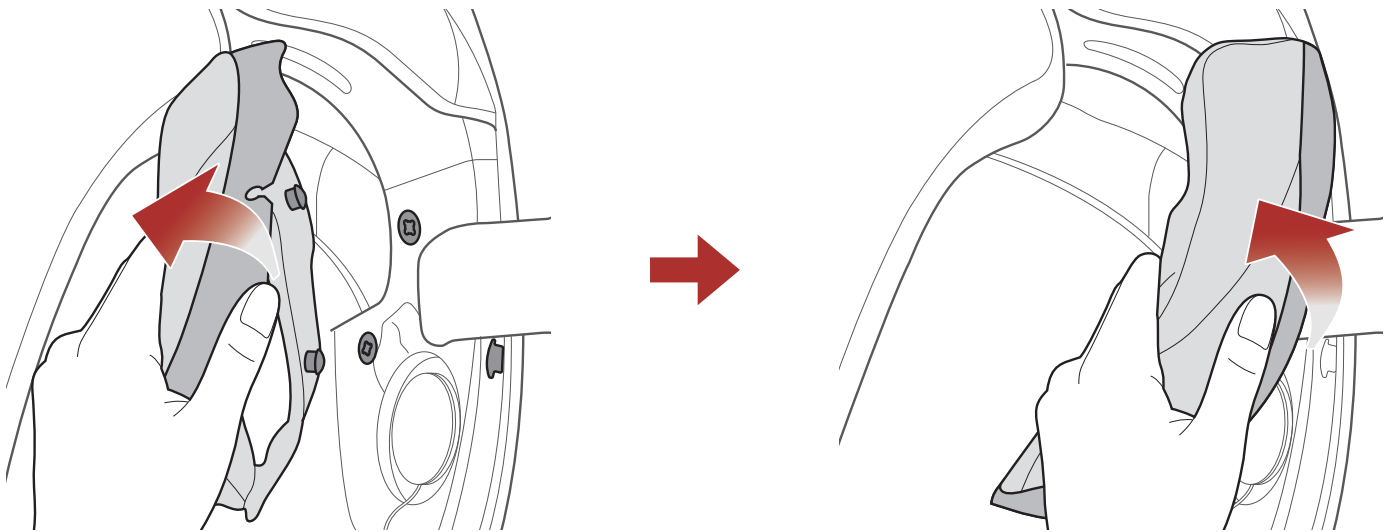


1. Unsnap the two cheek pad fasteners and detach the one hook from the helmet.
2. Remove the cheek pad by pulling it upward.
3. Repeat the process on the opposite side.

2.8 Installing the Cheek Pads

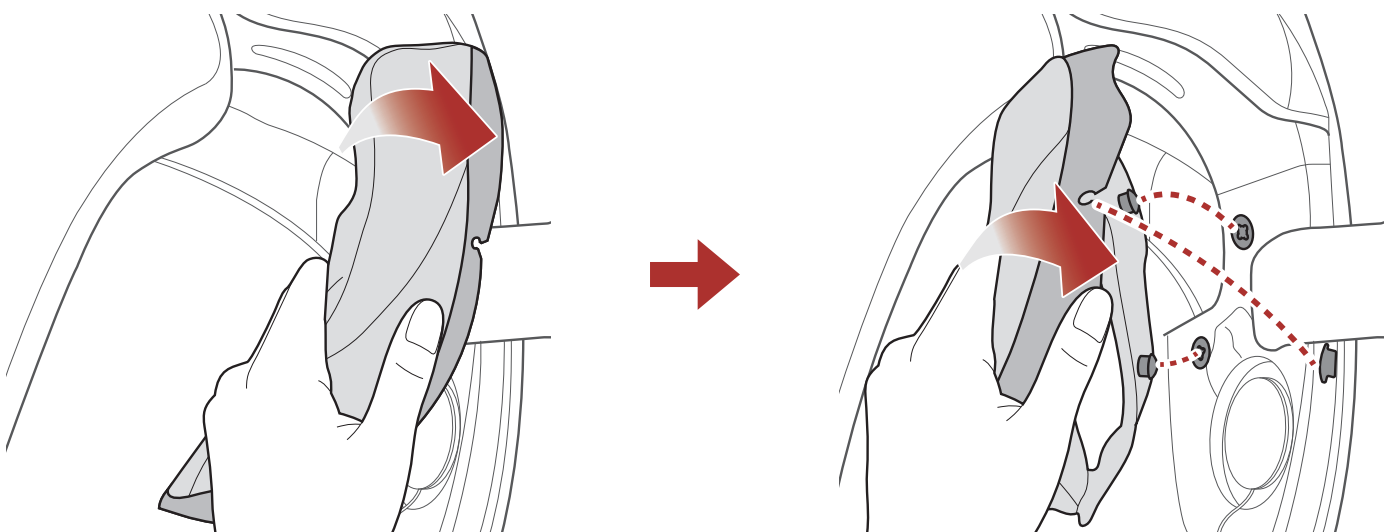


1. Pass the chinstrap through the hole in the cheek pad, and insert the cheek pad's plastic plate into the space between the shell and EPS.
2. Snap the two cheek pad fasteners and engage the one hook into place.
3. Repeat the process on the opposite side.

2.9 Removing the Inner Pad

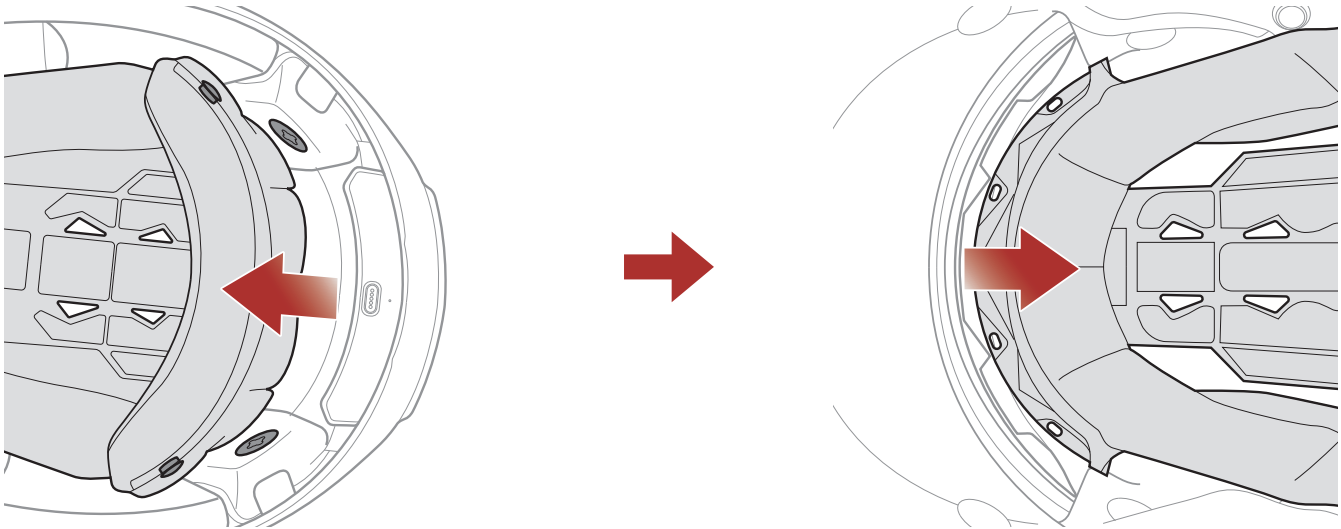


1. Unsnap the two inner pad rear fasteners.
2. Lift the pad upward and place your fingers under the plastic plate in the front section. Then, remove the plate by pulling it away from the front of the helmet.

2.10 Installing the Inner Pad

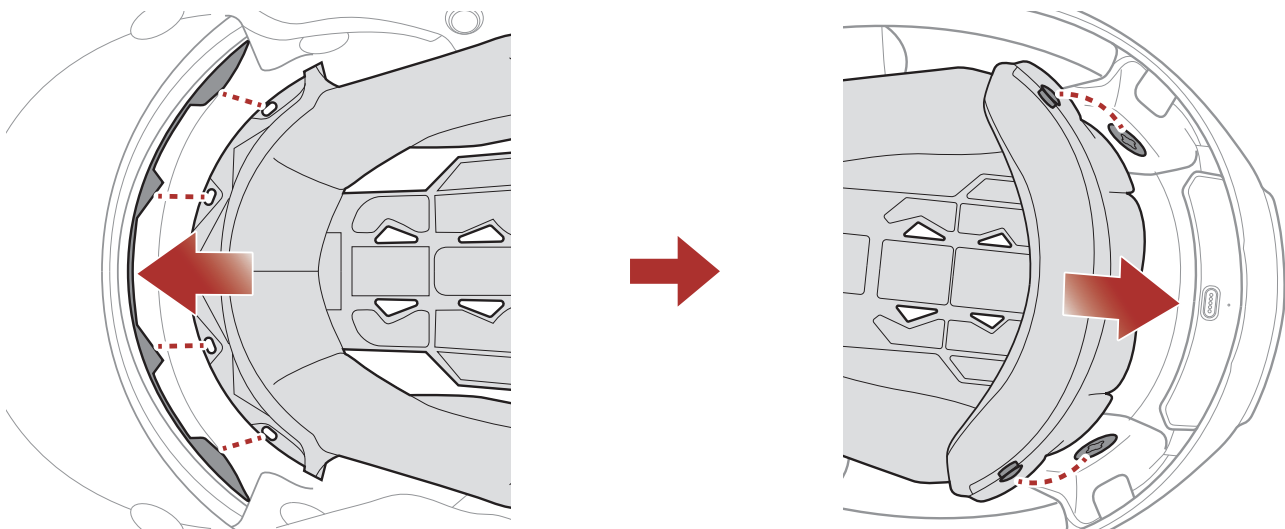


1. Align and install the plastic plate on the four sleeves of the front section.
2. Snap the two inner pad rear fasteners into place.

2.11 Removing the Inner Sun Visor

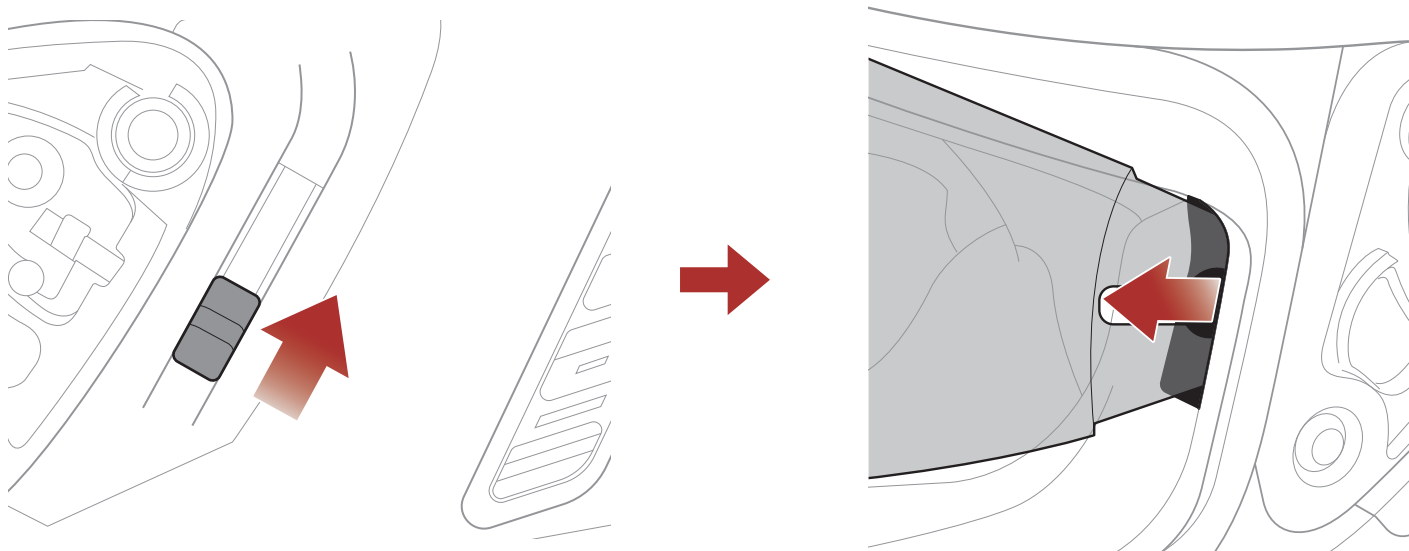

1. Slide the inner sun visor lever in the direction shown in the illustration above to lower the inner sun visor.
2. Pull one side of the visor in the direction shown in the illustration above.
3. Repeat Step 2 on the opposite side.

2.12 Installing the Inner Sun Visor

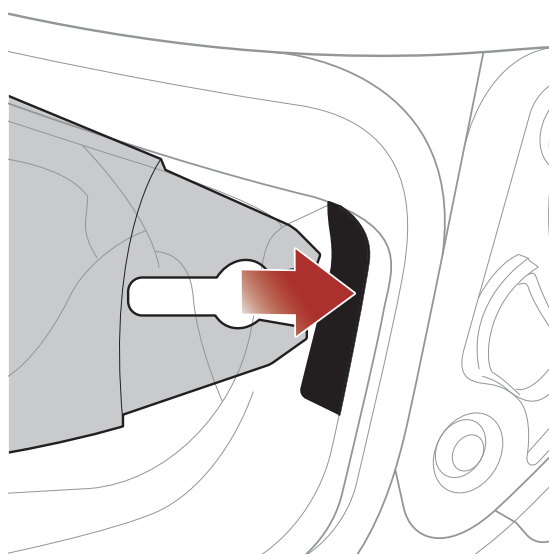

1. Insert the inner sun visor tab into its slot until you hear a click.
2. Repeat Step 1 on the opposite side.

2.13 Pre-Ride Helmet Inspection

⚠ WARNING: This product is a motorcycle helmet. Do not use it for any other purpose than riding a motorcycle. If you use the helmet for anything else, it may not provide sufficient protection in an accident. No helmet can protect the wearer against all possible impact scenarios.

2.13.1 Checking the Exterior

Check the helmet regularly for damage. Small, superficial scratches will not impair the helmet's protective qualities. In the case of more serious damage (cracks, dents, flaking and cracking paint, etc.), the helmet should no longer be used.

2.13.2 Checking the Chinstrap

1. Ensure that the chinstrap is properly routed under your chin.
2. To test the chinstrap tension, slip your index finger under the chinstrap and pull. If the chinstrap is loose under the chin, it needs to be tightened. If the chinstrap loosens when you pull on it, the helmet is not properly fitted. Undo the chinstrap completely and try fastening it again, then repeat the test.
3. If you are unable to fasten the chinstrap so that it fits firmly against the chin, check that your helmet is still the right size for you.

Note: Repeat the test after each adjustment.

⚠ CAUTION: Never ride with the chinstrap unfastened or incorrectly adjusted. The chinstrap should fit correctly and should not become loose when pulled. The fastener is not correctly closed if the chinstrap becomes loose when pulled.

2.14 Checking the Shield Visor

Before every ride, clean the shield visor, check that it functions properly and that its surface is scratch- and crack-free. A malfunctioning, badly scratched or dirty shield will considerably impair your vision and should be replaced before riding.

⚠ CAUTION:

- A heavily scratched shield visor considerably interferes with visibility and should be replaced if necessary before riding.
- Stop riding if visibility is poor.

3. GETTING STARTED

3.1 Downloadable Sena Software

Sena Motorcycles App




WAVE Intercom App



Download the **Sena Motorcycles App** or **WAVE Intercom App** from the **Google Play Store** or the **App Store**. For detailed information on the **Wave Intercom**, find the **Wave Intercom User Guide** from sena.com.

3.2 Charging

Charging the Bluetooth System

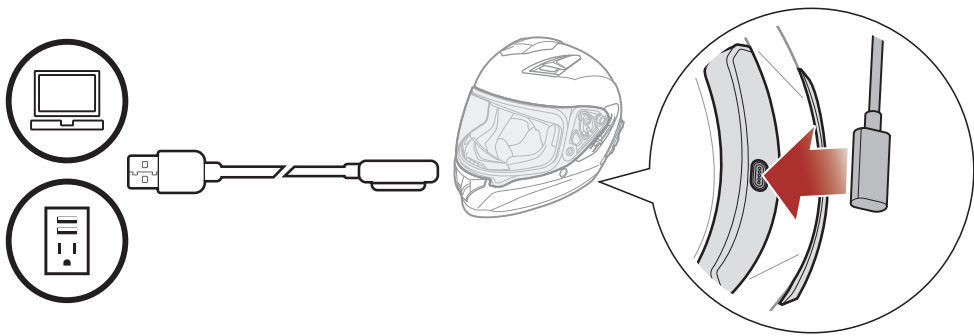

Depending upon the charging method, the Bluetooth system will be fully charged in about 2.5 hours.

Note:

- Please make sure to take off your helmet while charging. The Bluetooth system automatically turns off during charging.
- Any 3rd party USB charger can be used with Sena products if the charger is approved by either the FCC, CE, IC, or other locally approved agencies.
- Use of a non-approved charger may cause fire, explosion, leakage, and other hazards which may also reduce the life time or performance of the battery.

3.3 Legend



Tap button the specified number of times



Press and Hold button for the specified amount of time



"Hello"

Audible prompt

3.4 Powering On and Off

Powering On

 =   


Powering Off

 =   

3.5 Checking the Battery Level

Instructions are for when powering the Bluetooth system on.

Powering On

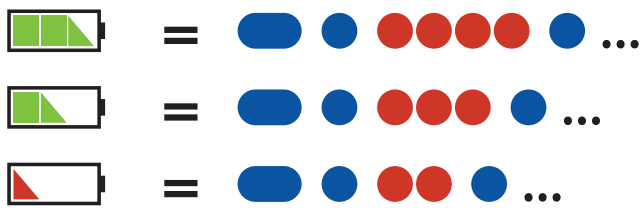 =    → 

Note: When the battery is low while in use, you will hear a voice prompt saying **"Low battery."**

3.6 Volume Adjustment

You can raise or lower the volume by tapping the **(+) Button** or the **(-) Button**. Volume is set and maintained independently at different levels for each audio source (i.e., phone, intercom), even when the Bluetooth system is rebooted.

Volume Up

 =  

Volume Down

 =  

4. PAIRING THE BLUETOOTH SYSTEM WITH OTHER BLUETOOTH DEVICES

When using the Bluetooth system with other Bluetooth devices for the first time, they will need to be “paired.” This enables them to recognize and communicate with one another whenever they are within range.

The Bluetooth system can pair with multiple Bluetooth devices such as a mobile phone or GPS via **Mobile Phone Pairing**, **Second Mobile Phone Pairing** and **GPS Pairing**. The Bluetooth system can also be paired with up to three other Sena Bluetooth systems.

Pairs with up to Three Sena Bluetooth Systems



4.1 Phone Pairing

There are three ways to pair the phone.

4.1.1 Initially Pairing the STRYKER

The Bluetooth system will automatically enter the phone pairing mode when you initially turn on the Bluetooth system or in the following situation:

- Rebooting after executing **Factory Reset**; or
- Rebooting after executing **Delete All Pairings**.

1. Press and hold the **Center Button** and the **(+) Button** for **1 second**.



2. Select **STRYKER** in the list of Bluetooth devices detected. If your mobile phone asks for a PIN, enter 0000.



Note:

- The phone pairing mode lasts for **3 minutes**.
- To cancel phone pairing, tap the **Center Button**.

4.1.2 Pairing When the STRYKER is Turned Off

1. While the Bluetooth system is off, press and hold the **Center Button** and the **(+) Button** until the LED flashes red and blue alternately and you hear a voice prompt, **"Phone pairing."**




2. Select **STRYKER** in the list of Bluetooth devices detected. If your mobile phone asks for a PIN, enter 0000.



4.1.3 Pairing When the STRYKER is Turned On

1. While the Bluetooth system is on, press and hold the **Center Button** for **10 seconds**.

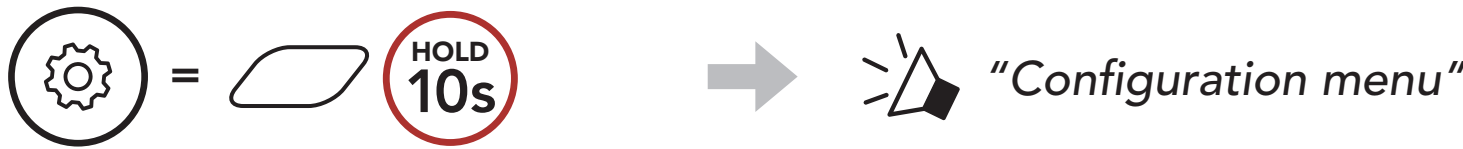

2. Tap the **(+) Button**.




3. Select **STRYKER** in the list of Bluetooth devices detected. If your mobile phone asks for a PIN, enter 0000.



4.2 Second Mobile Phone Pairing

1. Press and hold the **Center Button** for **10 seconds**.

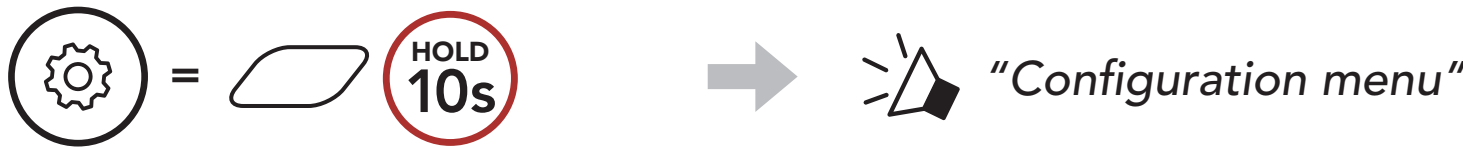

2. Double tap the **(+) Button**.



3. Select **STRYKER** in the list of Bluetooth devices detected. If your Bluetooth device asks for a PIN, enter 0000.




4.3 Advanced Selective Pairing: Hands-Free or A2DP Stereo

Phone Pairing allows the Bluetooth system to establish two Bluetooth profiles: **Hands-Free** or **A2DP Stereo**. **Advanced Selective Pairing** allows the Bluetooth system to separate the profiles to enable connection with two devices.

4.3.1 Phone Selective Pairing - Hands-Free Profile

1. Press and hold the **Center Button** for **10 seconds**.

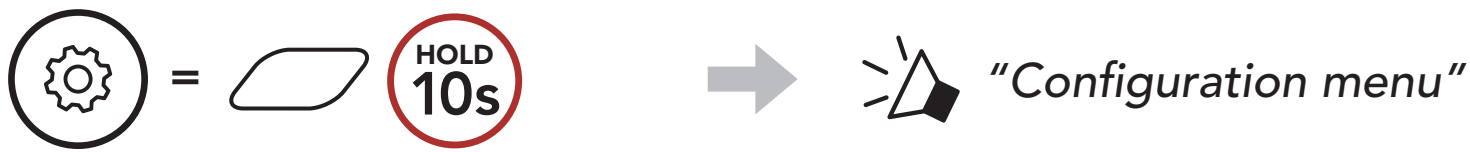

2. Tap the **(+) Button** 3 times.




3. Select **STRYKER** in the list of Bluetooth devices detected. If your mobile phone asks for a PIN, enter 0000.



4.3.2 Media Selective Pairing - A2DP Profile

1. Press and hold the **Center Button** for **10 seconds**.

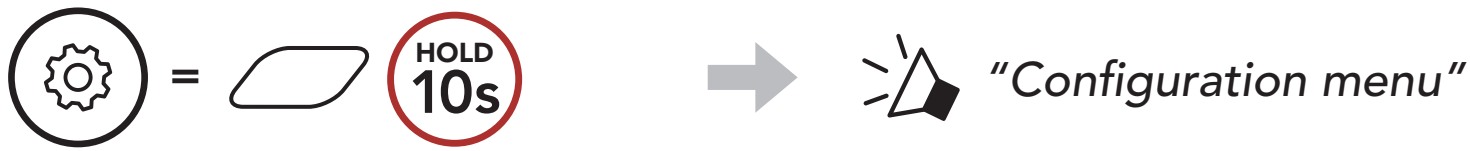

2. Tap the **(+) Button** 4 times.




3. Select **STRYKER** in the list of Bluetooth devices detected. If your mobile phone asks for a PIN, enter 0000.



4.4 GPS Pairing

1. Press and hold the **Center Button** for **10 seconds**.

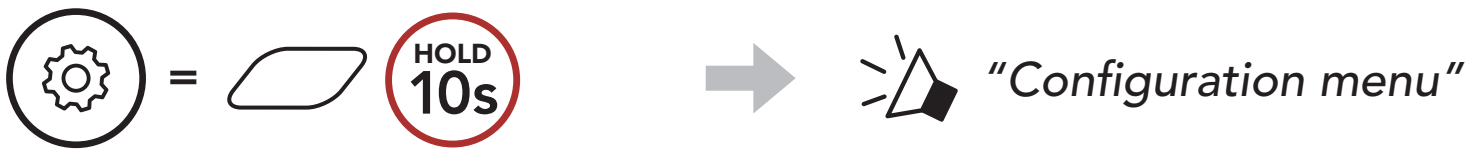

2. Tap the **(+) Button** 5 times.




3. Select **STRYKER** in the list of devices detected. If your Bluetooth device asks for a PIN, enter 0000.




5. MOBILE PHONE USAGE

5.1 Making and Answering Calls


Answer a Call

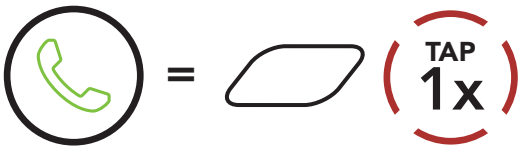

End a Call

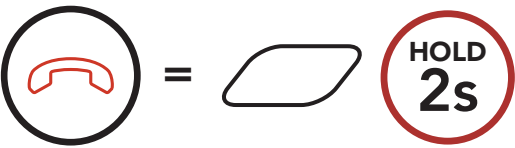

Reject a Call

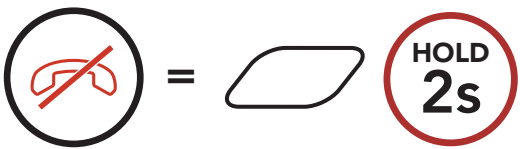

5.2 Siri and Google Assistant

The **STRYKER** supports the **Siri** and **Google Assistant** access directly. You can activate the **Siri** or **Google Assistant** using the voice through the **STRYKER**'s microphone, a wake word will be used. This is a word or a group of words such as **"Hey Siri"** or **"Hey Google."**

Activate the Siri or Google Assistant Installed on Your Smartphone



5.3 Speed Dialing

5.3.1 Assigning Speed Dial Presets


Speed Dial Presets could be assigned through the **Sena Motorcycles App**.

5.3.2 Using Speed Dial Presets

1. Enter into the **Speed Dial** menu.



2. Navigate forward or backward through **Speed Dial Preset** numbers.

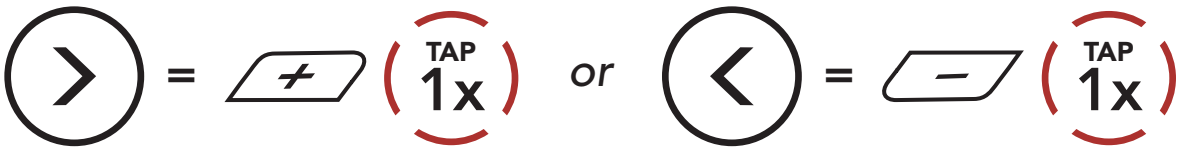

- (1) Last number redial

(2) Speed dial 1


(3) Speed dial 2
- (4) Speed dial 3

(5) Cancel

3. Call one of your **Speed Dial Presets** numbers.




4. Redial the last number called.

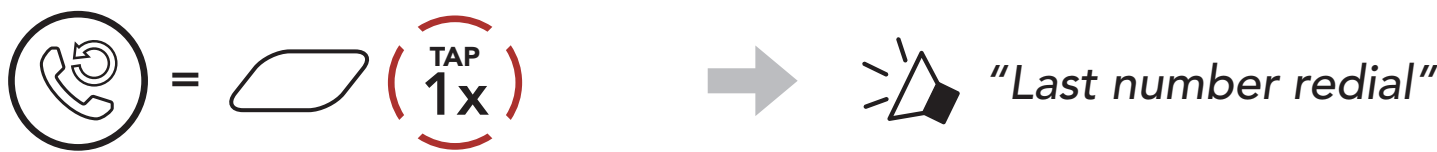


6. STEREO MUSIC

6.1 Bluetooth Stereo Music


Play/Pause Music

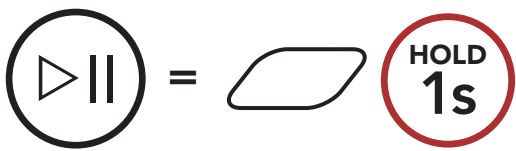

Next Track

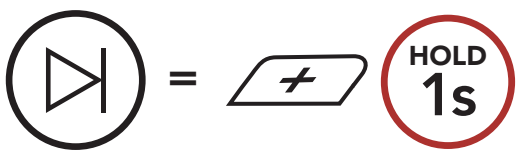

Previous Track

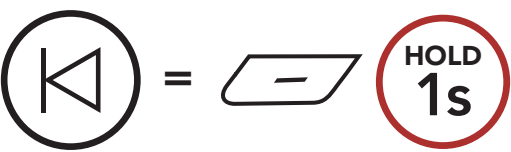

6.2 Music Sharing

You can start sharing music with one intercom friend using Bluetooth stereo music during a two-way intercom conversation and one participant of a Mesh. If you start sharing music while Bluetooth intercom and Mesh Intercom are running at the same time, then music shared during Bluetooth intercom will take priority over music shared during Mesh Intercom.


Note:

- Both you and your intercom friend can remotely control music playback such as track forward and track back.
- **Music sharing** will be paused when you are using your mobile phone or listening to GPS instructions.
- **Music sharing** will be terminated if the Bluetooth system starts a multi-way intercom conference.

6.2.1 Bluetooth Intercom Music Sharing

You can start sharing the music with one intercom friend of a two-way intercom conversation.


Start/Terminate Sharing Music

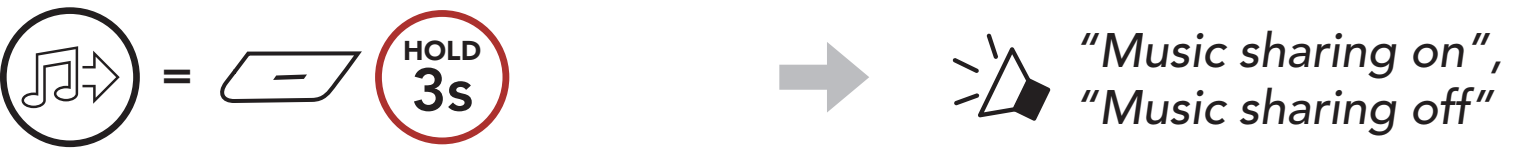



6.2.2 Mesh Intercom Music Sharing

You can start sharing music with one participant of a **Mesh Intercom**.

- 1. The **Creator** will send a request message to **participants** connected during **Mesh Intercom**.

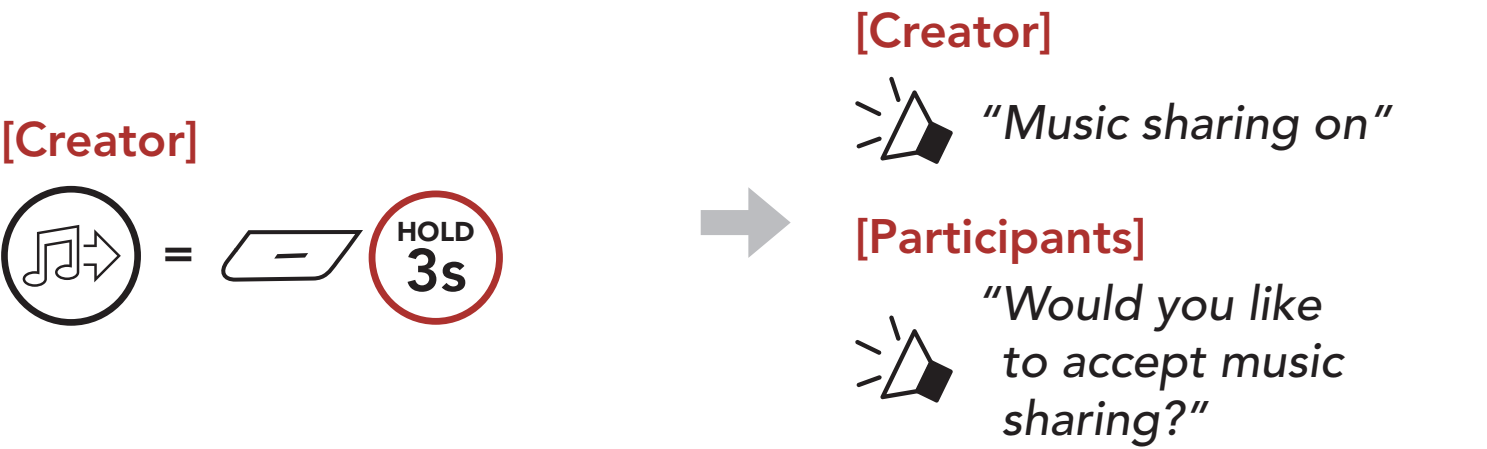

- 2. The **Creator** will share music with the **first participant** that accepts the request.

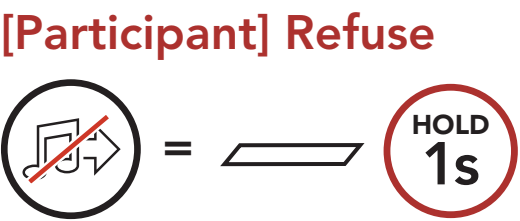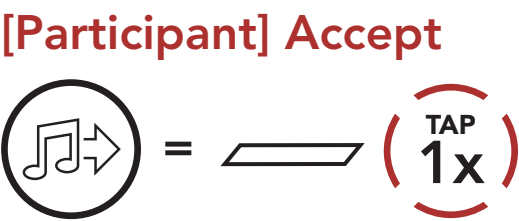

7. MESH INTERCOM


7.1 What is Mesh Intercom?

Mesh Intercom is a dynamic communication system created by Sena that provides instant and effortless bike-to-bike communication without a pre-grouping process. **Mesh Intercom** allows users to connect and communicate with nearby users without the need to pair each Bluetooth system together.

The working distance between each **STRYKER** in **Mesh Intercom** can be up to 2 km (1.2 miles) in open terrain. In open terrain, the **Mesh** can be extended up to 8 km (5 miles) between a minimum of six users.


Users can communicate in two modes:

- Open Mesh™ for open group intercom conversations.
- Group Mesh™ for private group intercom conversations.

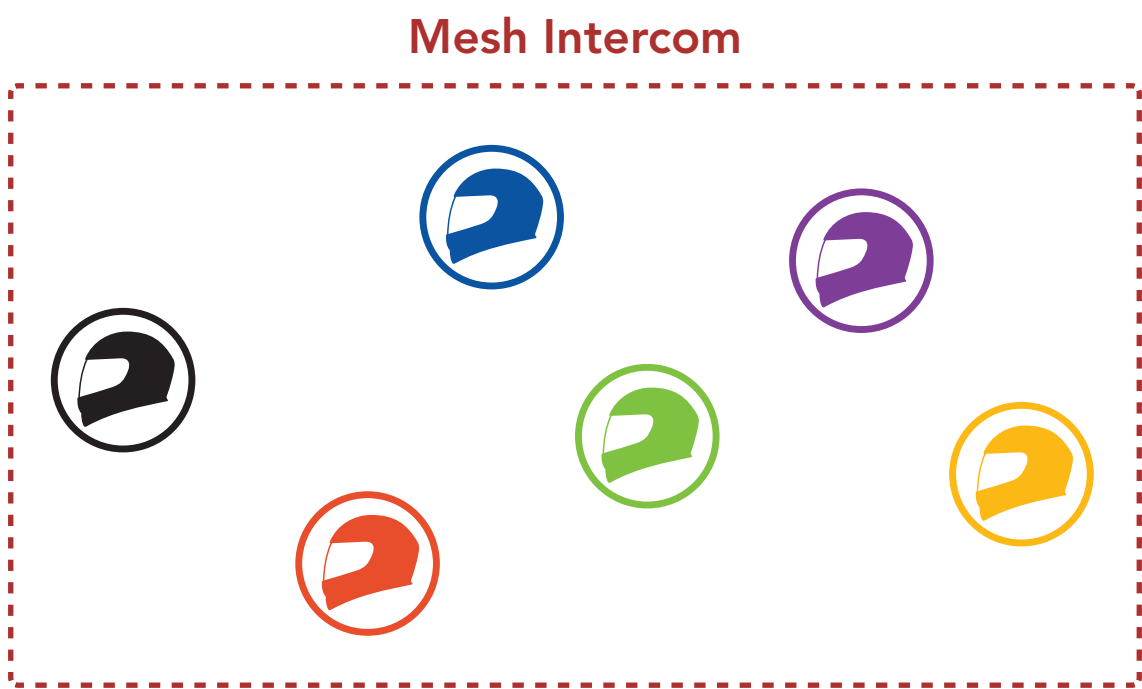

7.1.1 Open Mesh


Open Mesh is an open group intercom function. Users can freely communicate with each other in the same **Open Mesh** channel and select which channel (1-6) to use through the Bluetooth system. It can connect with a virtually unlimited number of users in each channel.

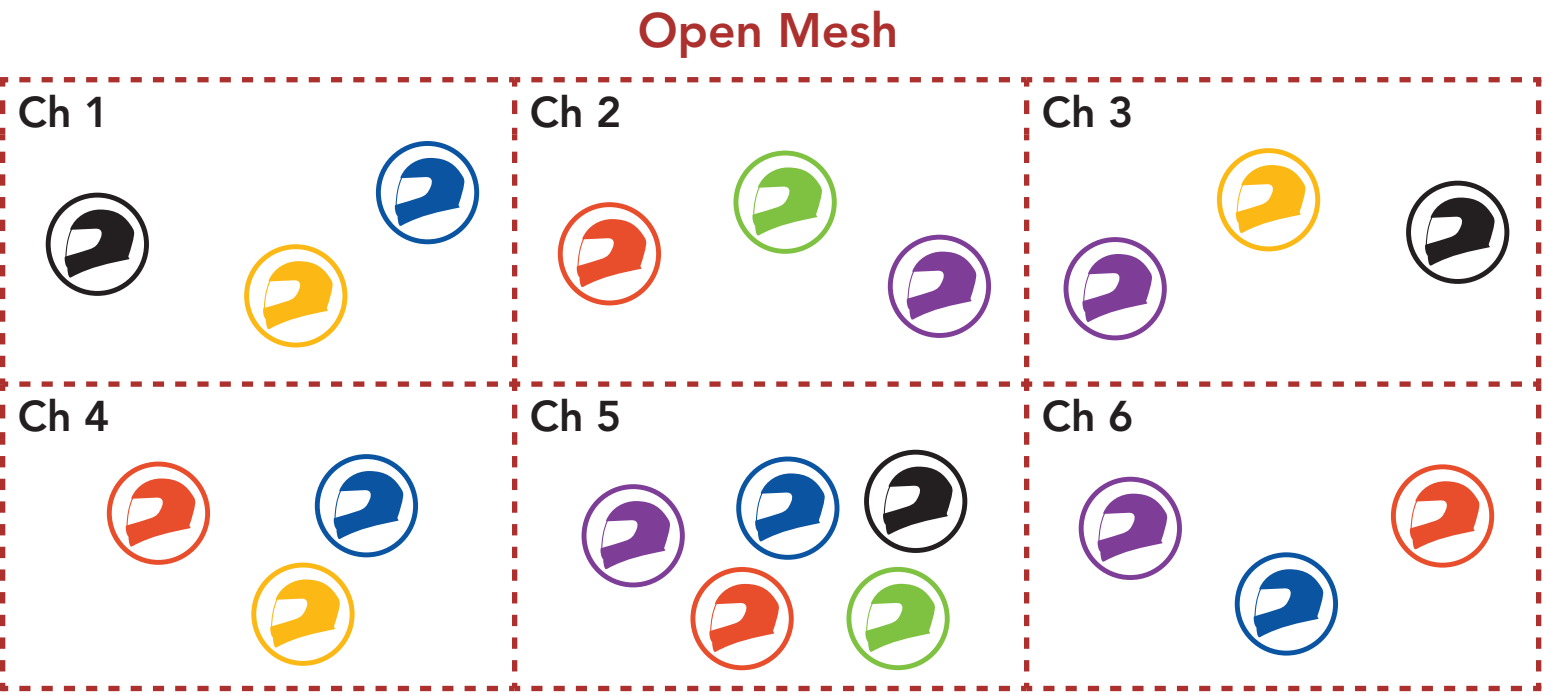

7.1.2 Group Mesh

Group Mesh is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each Bluetooth system. Users can freely communicate with each other in the same private group in **Group Mesh**.

For closed intercom conversations using **Mesh Intercom**, a **Group Mesh** needs to be created by the users. When users create a private group in **Group Mesh** by **Mesh Grouping**, the Bluetooth system automatically switches from **Open Mesh** to **Group Mesh**. Up to 24 users can all be connected in each private group.

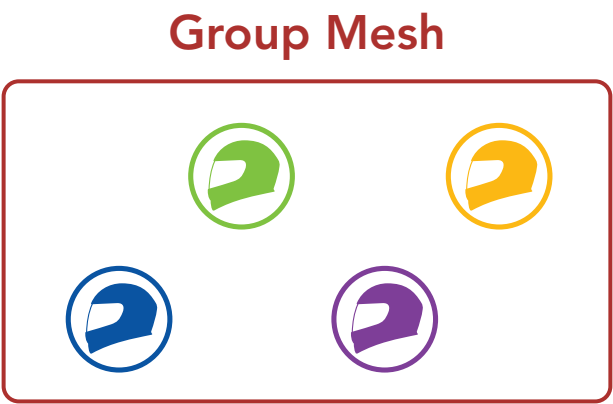

7.2 Mesh Version Switch


Switch to Mesh 2.0 for Backward Compatibility

Mesh 3.0 is the latest Mesh Intercom technology, but to communicate with legacy products using Mesh 2.0, please switch to Mesh 2.0 using the **Sena Motorcycles App**.


7.3 Starting Mesh Intercom

When **Mesh Intercom** is enabled, the **STRYKER** will automatically connect to nearby **STRYKER** users and allow them to talk to each other.

Mesh Intercom On

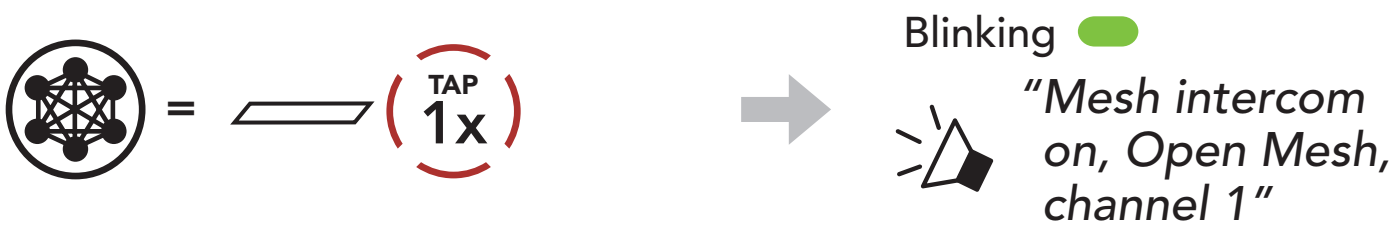

Mesh Intercom Off

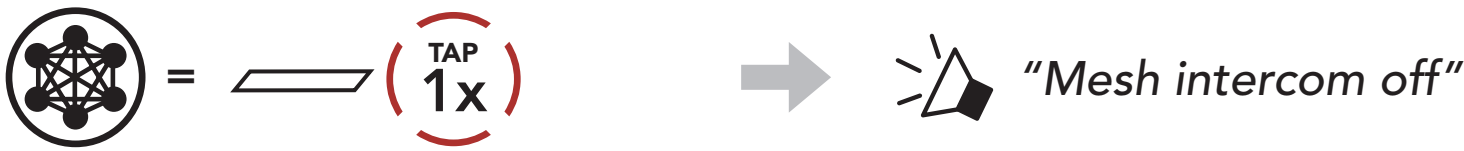


7.4 Using the Mesh in Open Mesh

When **Mesh Intercom** is enabled, the Bluetooth system will be in **Open Mesh (default: channel 1)** initially.

7.4.1 Channel Setting (Default: channel 1)

If the **Open Mesh** communication experiences interference because other groups are also using **channel 1 (default)**, change the channel. You can select from channels 1 to 6.

1. Double tap the **Mesh Intercom Button**.

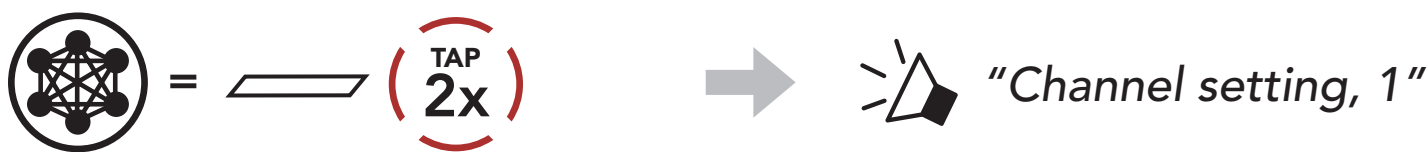

2. Navigate between channels.
(1 → 2 → ... → 6 → Exit → 1 → ...)



3. Save the channel.




Note:

- **Channel Setting** always starts with channel 1.
- If you do not press any button for approximately **10 seconds** in a specific channel, the channel is automatically saved.
- The channel will be remembered even if you turn off the **STRYKER**.
- You can use the **Sena Motorcycles App** to change the channel.

7.5 Using Mesh in Group Mesh

7.5.1 Creating a Group Mesh

Creating a **Group Mesh** requires **two or more Open Mesh users**.

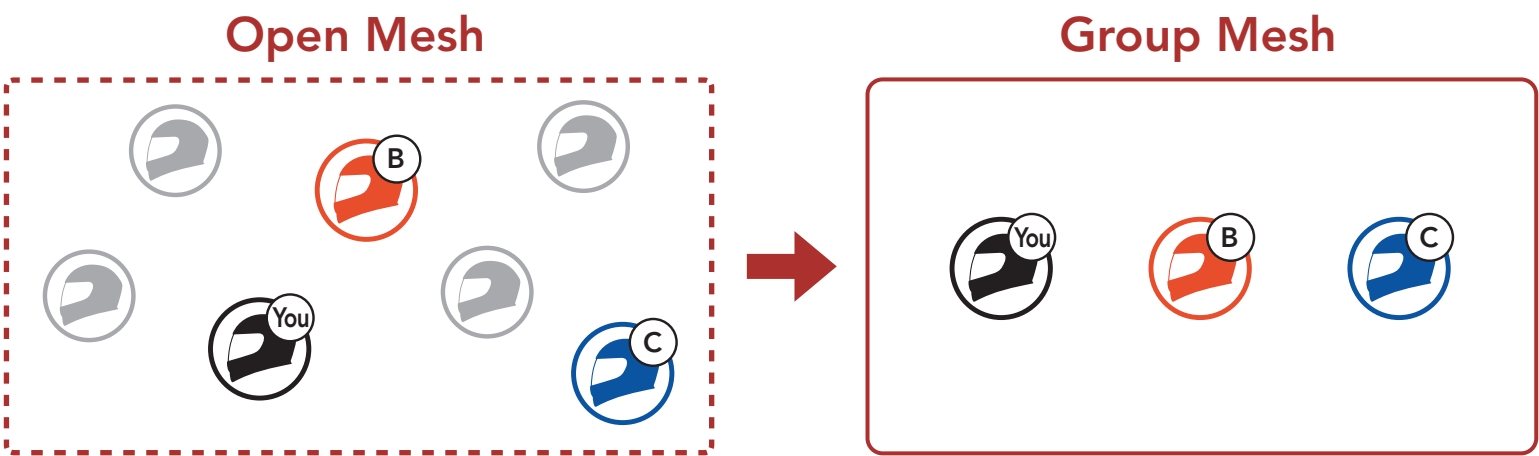

1. To enter **Mesh Grouping** to create a **Group Mesh**, press and hold the **Mesh Intercom Button** for **5 seconds** on the Bluetooth system of the **users (You, B, and C)**.



2. When **Mesh Grouping** is completed, the **users (You, B and C)** will hear a voice prompt on their Bluetooth systems as **Open Mesh** switches to **Group Mesh**.




Note:

- If the **Mesh Grouping** is not completed within **30 seconds**, users will hear a voice prompt, **"Grouping failed."**
- If you want to cancel during the **Mesh Grouping**, tap the **Mesh Intercom Button**.

7.5.2 Joining an Existing Group Mesh

One of the current users in an **Existing Group Mesh** can allow **new users (one or more)** in **Open Mesh** to join the **Existing Group Mesh**.

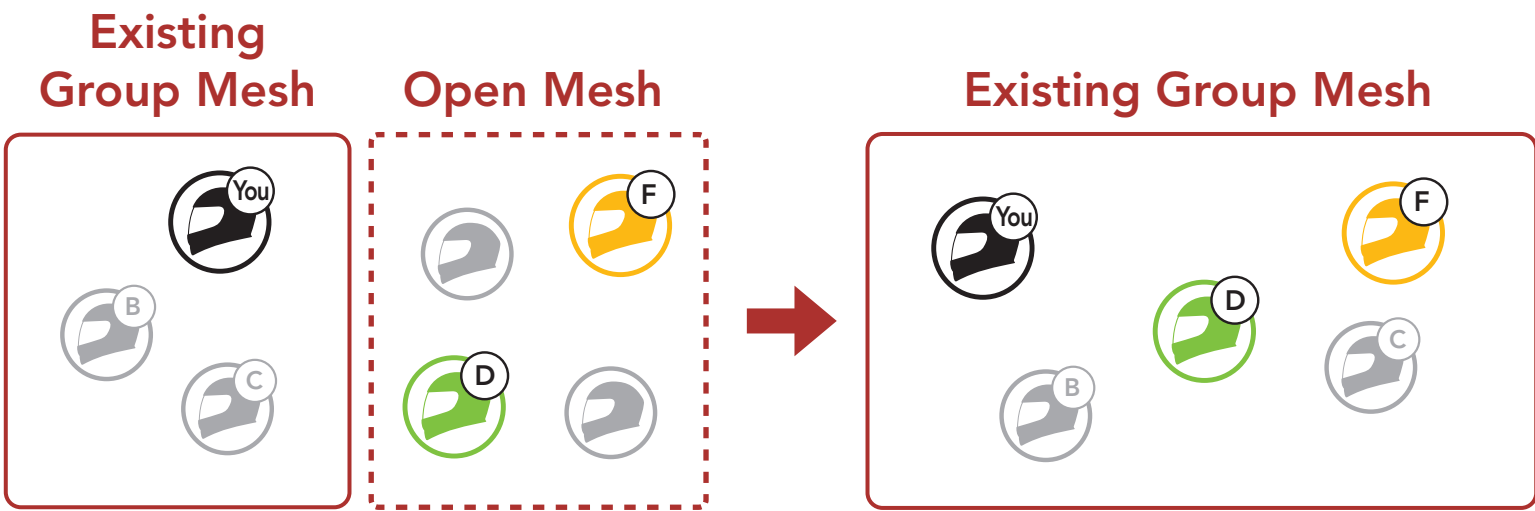

1. To enter **Mesh Grouping** to join the **Existing Group Mesh**, press and hold the **Mesh Intercom Button** for **5 seconds** on the Bluetooth systems of **one (You) of the current users** in the **Existing Group Mesh** and the **new users (D and F)** in **Open Mesh**.




2. When **Mesh Grouping** is completed, the **new users (D and F)** will hear a voice prompt on their Bluetooth systems as **Open Mesh** switches to **Group Mesh**.



Note: If the **Mesh Grouping** is not completed within **30 seconds**, the current user (You) will hear low-toned double beeps and the new users (D and F) will hear a voice prompt, **"Grouping failed."**

7.6 Enable/Disable Mic (Default: Enable)

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.

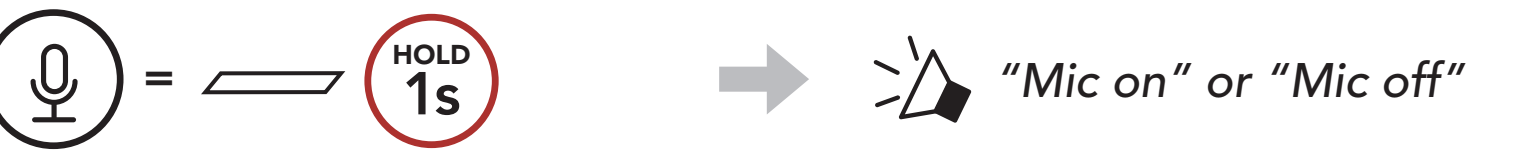


7.7 Toggling Open Mesh/Group Mesh

Users are able to toggle between **Open Mesh** and **Group Mesh** without resetting the **Mesh**. This allows users to keep the **Group Mesh Network** connection information while in **Open Mesh**.

Users can toggle to **Group Mesh** to communicate with participants from the stored **Group Mesh Network** connection information.

Toggle Between Open Mesh and Group Mesh

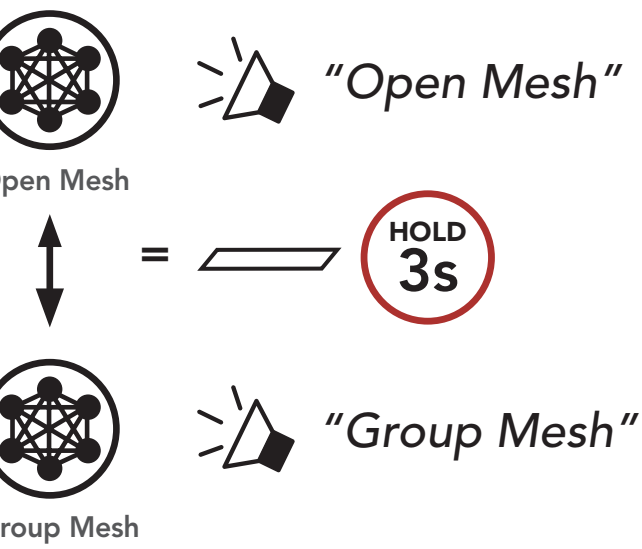


Note: If you have never participated in **Group Mesh**, you cannot toggle between **Open Mesh** and **Group Mesh**. You will hear a voice prompt, **"No group available."**

7.8 Mesh Reach-Out Request

You (caller) can send a request message to turn on the Mesh Intercom to nearby* friends who have it turned off.

- 1. If you want to send or receive a request message, you need to enable **Mesh Reach-Out** on the **Sena Motorcycles App**. Please refer to **Section 16.2: "Software Configuration Setting."**
- 2. While your Bluetooth system's Mesh Intercom is on, you (caller) send a request message using the **Bluetooth system's Button** or the **Sena Motorcycles App**.

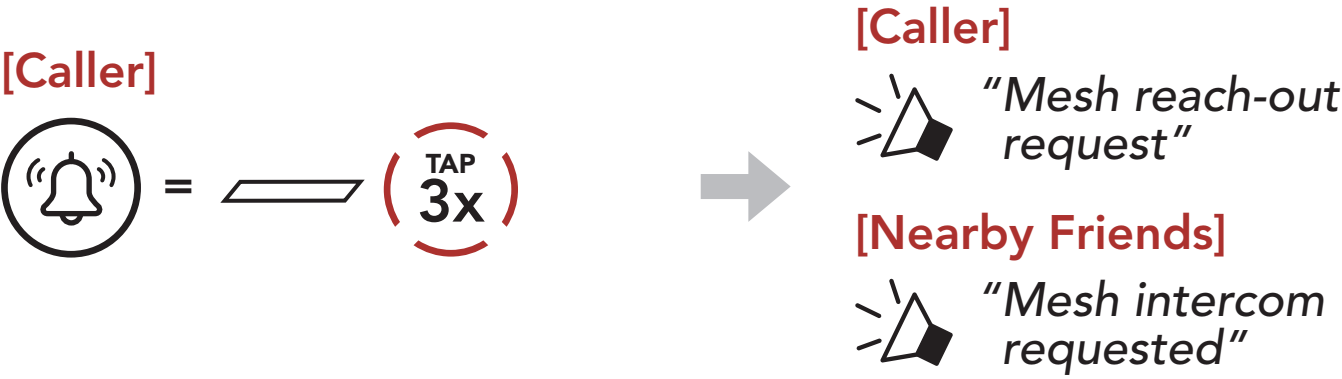

- 3. Friends who receive the request message need to manually turn on their Mesh Intercom using the **Bluetooth system's Button** or the **Sena Motorcycles App**.

Note:

- *: Up to 100 m (109 yds) in open terrain
- To use the **Mesh Reach-Out Request** function, **you (caller) who sends a request message and the friends who receive the request message must update the Bluetooth system to the latest firmware version and the app to the latest version.**

7.9 Reset Mesh

If a Bluetooth system in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.



8. WAVE INTERCOM

Wave Intercom enables open communication using cellular data. For detailed information, please refer to the **Wave Intercom User Guide** on sena.com.

8.1 Starting Wave Intercom

To start Wave Intercom, you must open the **WAVE Intercom App** first. Then, double-tap the **Mesh Intercom Button** to join Wave Intercom. You will hear a voice prompt, **"Wave Intercom on."**

When Wave Intercom is enabled, you will automatically connect with users in the Wave Zone. The Wave Zone covers a 5-mile radius in North America, and an 8-km radius in Europe.

To end Wave Intercom, single-tap the **Mesh Intercom Button**. You will hear a voice prompt, **"Wave Intercom off."**

8.2 Switching between Wave Intercom and Mesh Intercom

You can easily switch between Mesh Intercom and Wave Intercom with a single tap on the **Center Button**.


When switching from Mesh Intercom to Wave Intercom, you will hear a voice prompt, **"Mesh Intercom off. Wave Intercom on."**

When switching back, you will hear a voice prompt, **"Wave Intercom off. Mesh Intercom on."**

Note: When the app is in use, the Bluetooth Intercom becomes temporarily disabled.

9. BLUETOOTH INTERCOM

Up to three other people can be paired with the Bluetooth system for Bluetooth intercom conversations.

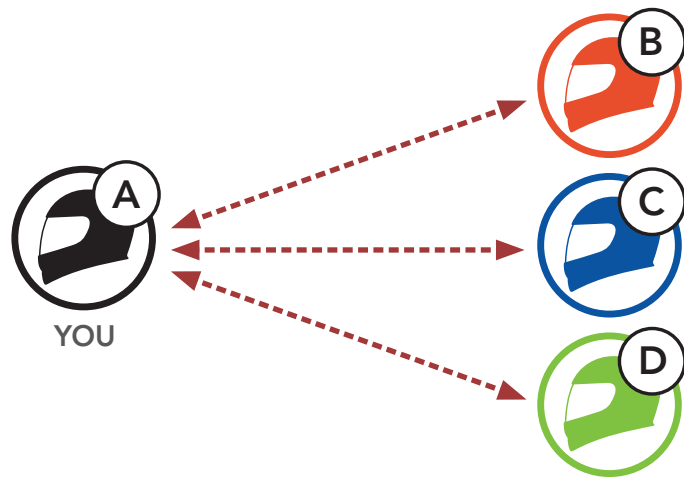

9.1 Intercom Pairing

There are two ways to pair the Bluetooth system.

9.1.1 Using the Smart Intercom Pairing (SIP)

SIP allows you to quickly pair with your friends for intercom communication by scanning the QR code on the **Sena Motorcycles App** without remembering the button operation.

1. Pair the mobile phone with the Bluetooth system.
2. Open the **Sena Motorcycles App** and tap  (**Smart Intercom Pairing Menu**).
3. Scan the **QR code** displayed on your friend (**B**)'s mobile phone.
 - Your friend (**B**) can display the QR code on the mobile phone by tapping  > **QR code** () on the **Sena Motorcycles App**.




- 4. Tap **Save** and check that your friend **(B)** is paired with **you (A)** correctly.
- 5. Tap **Scan** (📷) and repeat steps 3-4 to pair with **Intercom Friends (C)** and **(D)**.

Note: The **Smart Intercom Pairing (SIP)** is not compatible with Sena products that use **Bluetooth 3.0** or **below**.


9.1.2 Using the Button



- 1. **Users (You, B)** enter into **Intercom Pairing**.

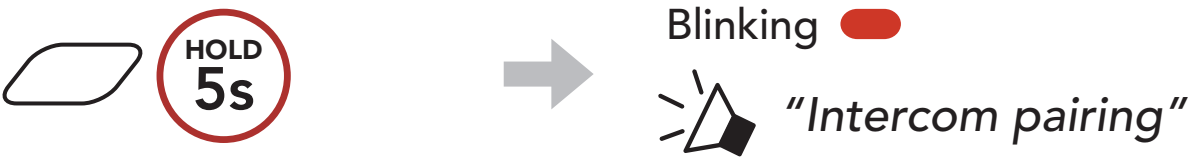

- 2. The **two Bluetooth systems (A and B)** will be automatically paired.

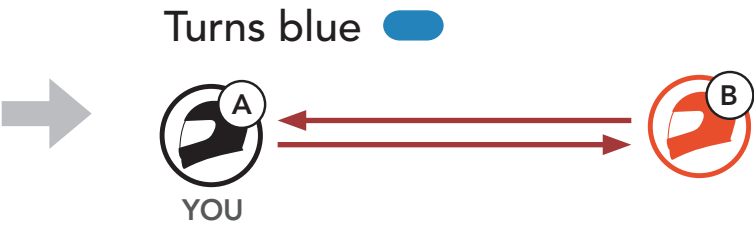


- 3. Repeat the steps above to pair with **other Bluetooth systems (C and D)**.

9.2 Last-Come, First-Served

The intercom pairing queue is **Last-Come, First-Served**. If a Bluetooth system has multiple paired Bluetooth systems for intercom conversations, the last paired Bluetooth system is set as the **First Intercom Friend**. For example, after the pairing procedures listed above, **Bluetooth system (D)** is the **First Intercom Friend** of Bluetooth system (A). **Bluetooth system (C)** is the **Second Intercom Friend** of Bluetooth system (A), and **Bluetooth system (B)** is the **Third Intercom Friend** of Bluetooth system (A).

Intercom Pairing Order

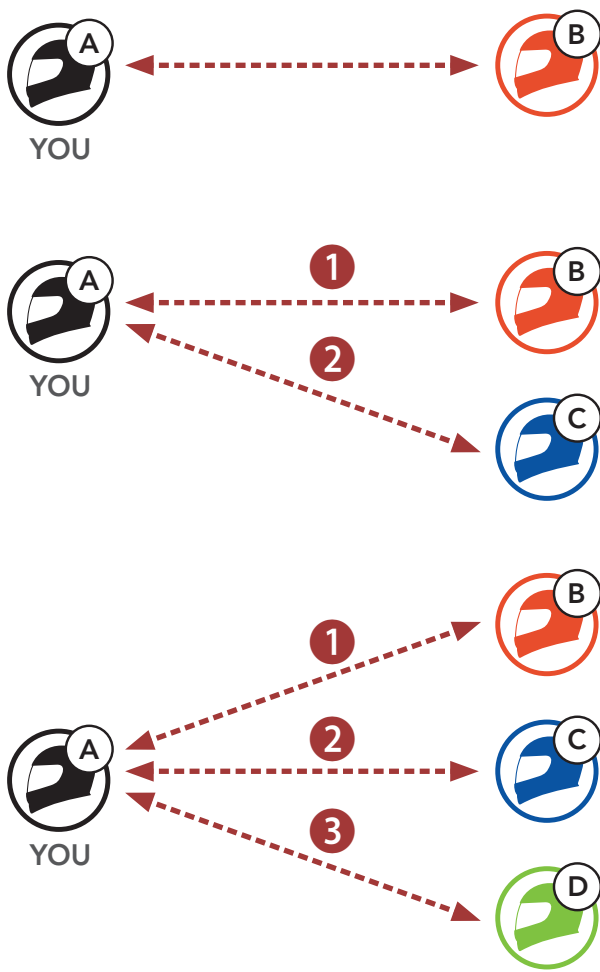

Last-Come, First-Served




9.3 Two-Way Intercom


You can start or end an intercom conversation with an **Intercom Friend**.




Start/End Conversation with the First Intercom Friend D

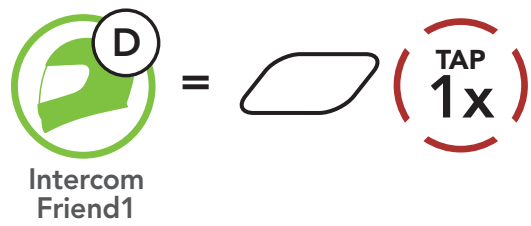

Start/End Conversation with the Second Intercom Friend C

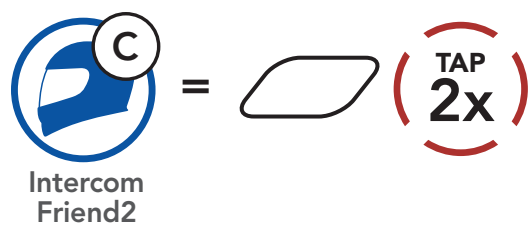

Start/End Conversation with the Third Intercom Friend B

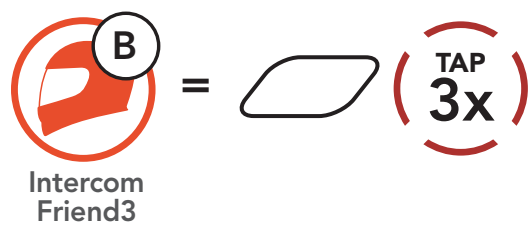

9.4 Multi-Way Intercom

Multi-Way Intercom enables conference-call-style conversations with up to **three Intercom Friends** at the same time. While **Multi-Way Intercom** is in progress, the mobile phone connection is temporarily disconnected. However, as soon as **Multi-Way Intercom** terminates, the mobile phone connection will be reestablished.

9.4.1 Starting a Three-Way Intercom Conference

You (A) can have a **Three-Way Intercom Conference** with two other **Intercom Friends (B and C)** by establishing two intercom connections simultaneously.

- 1. **You (A)** need to be paired with two other **Intercom Friends (B and C)** for the **Three-Way Intercom Conference**.



- 2. Start an intercom conversation with the **First Intercom Friend (C)** by tapping the **Center Button**.



- 3. **You (A)** can call the **Second Intercom Friend (B)** by double tapping the **Center Button**, or the **Second Intercom Friend (B)** may join the intercom by making an intercom call to **you (A)**.



- 4. Now **you (A)** and **two Intercom Friends (B and C)** are having a **Three-Way Intercom Conference**.



9.4.2 Starting a Four-Way Intercom Conference

With **three Intercom Friends** connected, a new participant (**D**) can make it a **Four-Way Intercom Conference** by making an intercom call to either (**B**) or (**C**).

1. **Intercom friend (B)** needs to be paired with a **new participant (D)**.



2. **Intercom friend (B)** can call a **new participant (D)** by tapping the **Center Button**, or a **new participant (D)** may join the intercom by making an intercom call to **Intercom friend (B)**.



3. Now **you (A)**, **two Intercom Friends (B and C)**, and a **new participant (D)** are having a **Four-Way Intercom Conference**.



9.4.3 Ending Multi-Way Intercom

You can completely terminate the conference intercom or just disconnect an intercom connection with one of your active **Intercom Friends**.

Terminate All Intercom Connections

- Press and hold the **Center Button** for **3 seconds**.

Disconnect the Intercom Connection with One of the Intercom Friends

- Disconnect (C): Tap the **Center Button**.
- Disconnect (B) & (D): Double tap the **Center Button**.


Note: When you disconnect the **second friend (B)**, you will be disconnected with the **third participant (D)** as well. This is because the **third participant (D)** is connected with you via the **second friend (B)**.

9.5 Three-Way Conference Phone Call with Intercom Users

You can have a **Three-Way Conference Phone Call** by adding an **Intercom Friend** to the mobile phone conversation.


- 1. During a mobile phone call, tap the **Center Button once, twice, or three times** to invite one of your **Intercom Friends** to the conversation.

Invite an Intercom Friend into Phone Conference

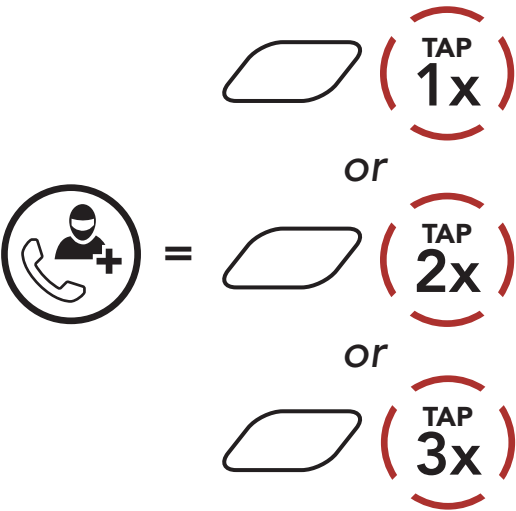


- 2. To disconnect the intercom during a conference phone call, tap the **Center Button once, twice, or three times**.

Disconnect the Intercom Friend from Conference

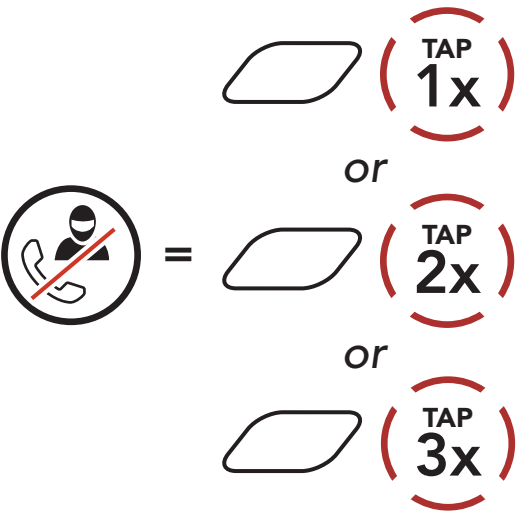

- 3. To disconnect the mobile phone call during a conference phone call, press and hold the **Center Button** for **2 seconds**.

End Phone Call from Conference

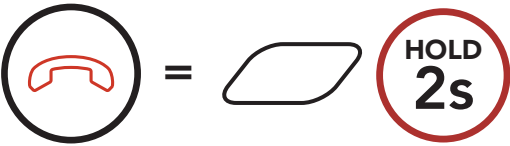


Note: When you have an incoming intercom call during a mobile phone call, you will hear high-toned double beeps.

9.6 Group Intercom

Group Intercom allows you to instantly create a **Multi-Way Conference Intercom** with three of the most recently paired Bluetooth systems.

To Start the Group Intercom

- 1. Go through intercom pairing with up to three Bluetooth systems you want to have **Group Intercom** with.

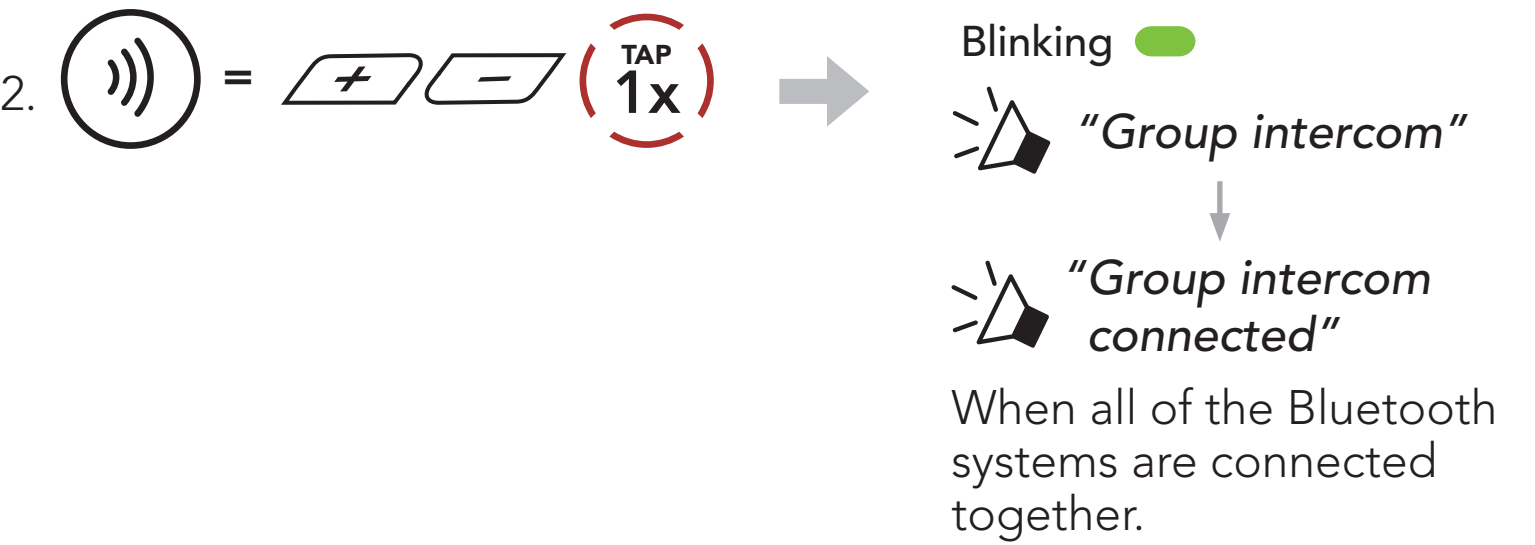

Terminate Group Intercom




9.7 Mesh Intercom Conference with Bluetooth Intercom Participant


Users can use the existing Bluetooth intercom and **Mesh Intercom** function at the same time. In this case, it is recommended to communicate with other Sena Bluetooth systems via Bluetooth intercom connection and use **Mesh Intercom** between Bluetooth systems. A user who is in **Open Mesh** or **Group Mesh** when using Mesh Intercom is able to include up to 3 of their Bluetooth intercom friends. You can start a Two-Way Intercom conversation with one of your three Intercom Friends to include them in the Mesh.

Note:

- The audio quality will be reduced if a **STRYKER** connects to 2 or more Bluetooth intercom friends while in **Open Mesh** or **Group Mesh** when using **Mesh Intercom**.
- If a closed loop is created, as shown below, each user will experience severe noise issues. Sena recommends that a closed loop not be created.

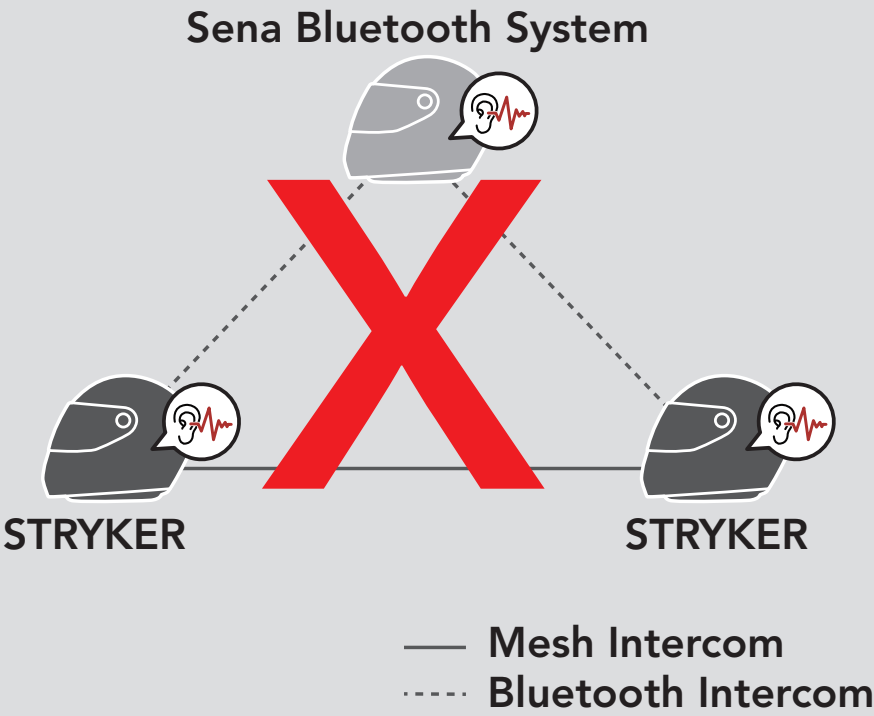

- If **Bluetooth intercom** is accidentally turned on during **Mesh Intercom** communication between **STRYKER** Bluetooth systems, as shown below, you will hear a voice prompt, “**Mesh intercom disabled. Bluetooth intercom connected**” every **1 minute**. If you turn off the **Bluetooth Intercom** or turn off the **Mesh Intercom**, the voice prompt will no longer come out.

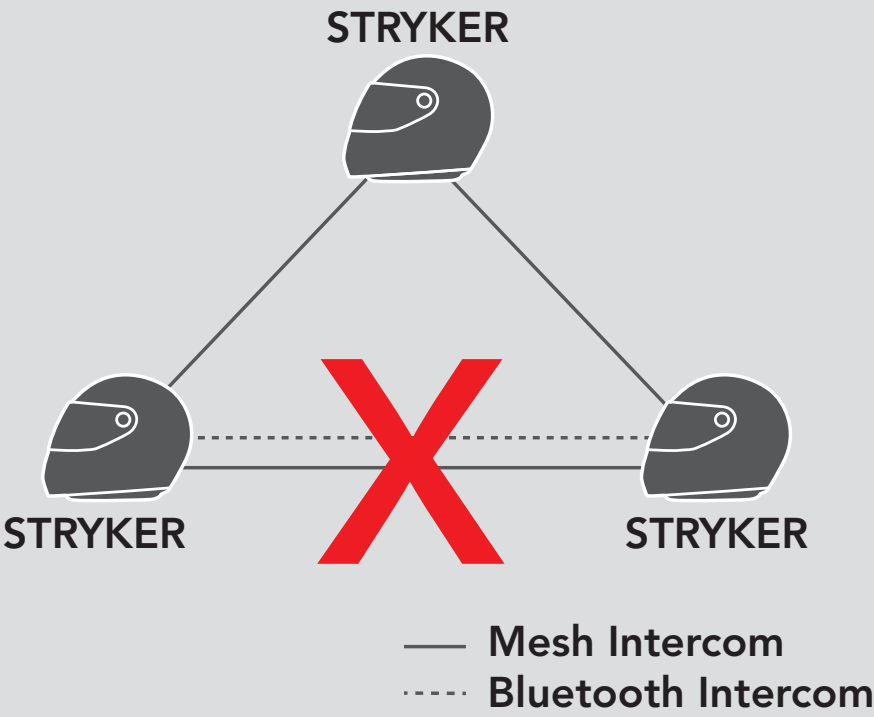

10. UNIVERSAL INTERCOM

Universal Intercom allows you to have intercom conversations with users of non-Sena Bluetooth headsets. Non-Sena Bluetooth headset can be connected to the Sena Bluetooth system if they support the **Bluetooth Hands-Free Profile (HFP)**. You can pair the Bluetooth system with only one non-Sena headset at a time. The intercom distance depends on the performance of the Bluetooth headset to which it's connected. When a non-Sena Bluetooth headset is paired with the Bluetooth system while another Bluetooth device is paired via **Second Mobile Phone Pairing**, it will be disconnected.

10.1 Universal Intercom Pairing

1.

 =  

→

 "Configuration menu"
2.

 =  

→

 "Universal intercom pairing"
3.

 =  


→

Enter into **Universal Intercom Pairing** mode.
4.

Put the non-Sena Bluetooth headset in Hands-free Pairing Mode. The Bluetooth system will automatically pair with a non-Sena Bluetooth headset.

10.2 Two-Way Universal Intercom

You can initiate the **Universal Intercom** connection with non-Sena Bluetooth headsets using the same intercom connection method as you would between other Sena headsets.

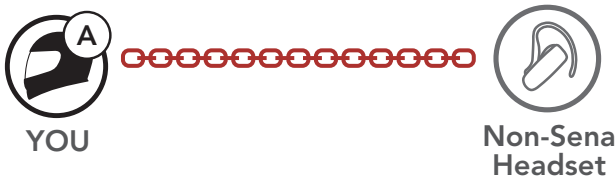

You may start/end a **Two-Way Universal Intercom** using the same way as you do in a normal **Two-Way Intercom**. Please refer to **Section 9.3: "Two-Way Intercom."**

10.3 Multi-Way Universal Intercom

You can have **Multi-Way Intercom** communication with up to **three Intercom Friends** using non-Sena headsets. Some non-Sena headsets may not support **Multi-Way Universal Intercom**.

You may make the **Multi-Way Universal Intercom** call the same way as a normal four-way intercom call.

You may start/end a **Multi-Way Universal Intercom** using the same way as you do in a normal **Multi-Way Intercom**. Please refer to **Section 9.4: "Multi-Way Intercom."**

10.3.1 Three-Way Universal Intercom

You may make a **Three-Way Universal Intercom** connection with two Bluetooth systems and one non-Sena Bluetooth headset. If the intercom connection is made, all headsets connected cannot use the mobile phone call function since the connection between the Bluetooth system and the phone is disconnected temporarily. If you disconnect the intercom call, the mobile phone connection is made again automatically so that you can use a mobile phone call function.

- 1. **You (A)** need to be paired with a non-Sena Bluetooth headset **(B)** and another headset **(C)** for the **Three-Way Conference Intercom**.



- 2. Start an intercom conversation with a non-Sena Bluetooth headset **(B)** in your intercom group. For example, **you (A)** may start an intercom conversation with non-Sena Bluetooth headset **(B)**. The non-Sena Bluetooth headset **(B)** may also start an intercom call with **you (A)**.



- 3. The other Bluetooth system **(C)** may join the intercom by making an intercom call to **you (A)**.



4. Now **you (A)**, non-Sena Bluetooth headset **(B)**, and the other Bluetooth system **(C)** are having a **Three-Way Conference Intercom**.



10.3.2 Four-Way Universal Intercom


You may make the **Four-Way Universal Intercom** call the same way as a normal **Four-Way Intercom** call.

You may make a **Four-Way Universal Intercom** connection with a couple of different configurations,

- 1) two Bluetooth systems and two non-Sena Bluetooth headsets or
- 2) three Bluetooth systems and one non-Sena Bluetooth headset.

Four-Way Universal Intercom Case 1

1) **You (A)**, a non-Sena Bluetooth headset **(B)**, another Bluetooth system **(C)**, and a non-Sena Bluetooth headset **(D)**.

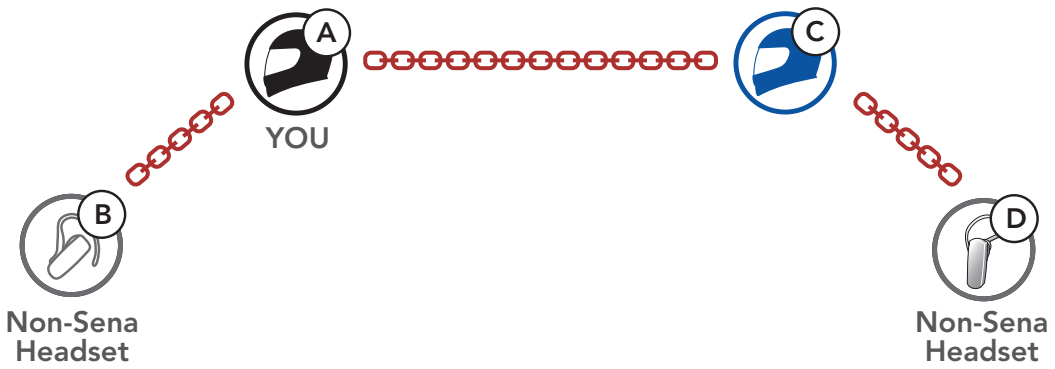

Four-Way Universal Intercom Case 2

2) **You (A)**, a non-Sena Bluetooth headset **(B)**, and **two other Bluetooth systems (C and D)**.



10.4 Mesh Intercom Conference with Two-way Universal Intercom Participant

Users can use the existing **Two-way Universal Intercom** and **Mesh Intercom** function at the same time. In this case, it is recommended to communicate with **non-Sena headset** via **Two-way Universal Intercom** connection and use **Mesh Intercom** between **Bluetooth systems**.

A user who is in **Open Mesh** or **Group Mesh** when using **Mesh Intercom** is able to include one **Universal Intercom friend**. You can start a **Two-way Universal Intercom** conversation with your **Universal Intercom Friend** to include it in the **Mesh**.

11. USING THE FM RADIO

11.1 FM Radio On/Off

FM Radio On



FM Radio Off




11.2 Seek and Save Radio Stations


The **“Seek”** feature searches for radio stations.

1. Search for radio stations.

Seek Stations Forward

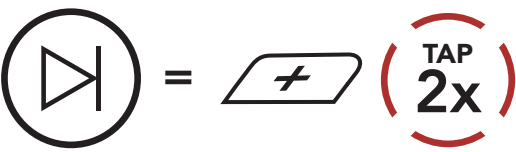

Seek Stations Backward

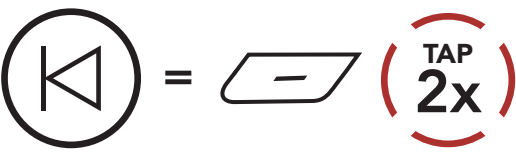


2. Save the current station.

Enter Preset Selection Mode




3. Navigate through the preset numbers that you want to store.

Navigate Forward/Backward Through Preset Stations

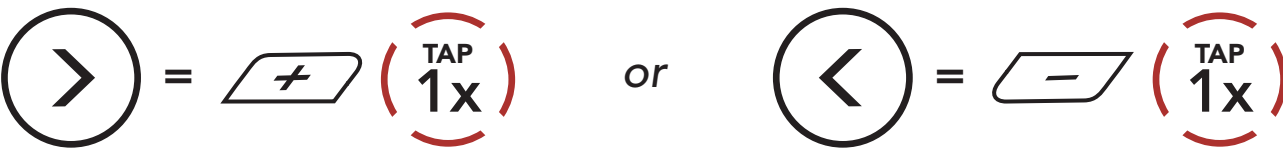


4. Save the station in the preset number you choose or delete the station from memory.

Save Station to the Preset Number

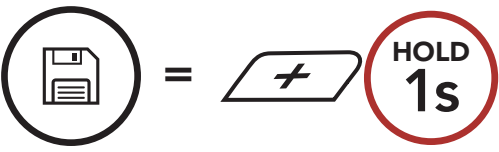

Delete Station from Memory

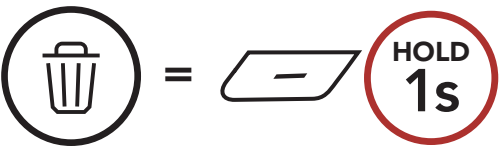


11.3 Scan and Save Radio Stations


The **“Scan”** function automatically searches for radio stations, starting with the current station’s frequency, then up from there.

- 1. Scan for stations.

Start Scanning

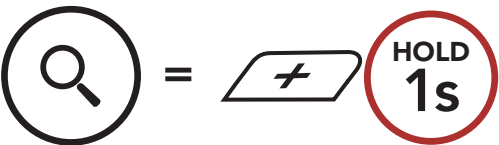

Stop Scanning

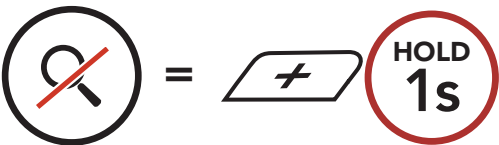

- 2. The Sena tuner pauses at each station it finds for **8 seconds** before moving to the next.
- 3. Save the current station. The station will be saved as the next preset number.

Save the Current Station




Note: You can use the **Sena Motorcycles App** to save the preset stations.

11.4 Temporary Station Preset

The **Temporary Preset** feature automatically finds and saves the nearest 10 radio stations without changing your existing preset stations.

- 1. Automatically find and save 10 stations.

Temporary Stations

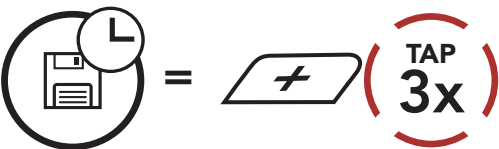


- 2. The temporary preset stations will be cleared when the Bluetooth system reboots.

11.5 Navigating Preset Stations

Using the methods above, up to 10 radio stations can be stored. You can navigate through the saved stations.


Navigate through Preset Stations

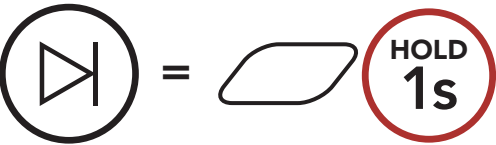

12. LED TAILLIGHT

You can control the LED Taillight through the **Sena Motorcycles App**.

- **Mode** : Solid / Night Flash / Day Flash / Off

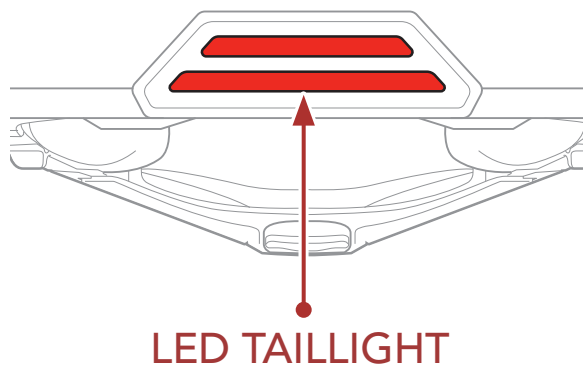

13. VOICE COMMAND

The **Voice Command** of the Bluetooth system allows you to operate certain operations by simply using your voice. You can control the Bluetooth system completely hands-free using the voice recognition. Multi-language Voice Command supports **English, French, German, Spanish, Italian, Chinese, Japanese, and Russian.**

Speak a Voice Command List

Mode Status	Function	Voice Command
Standby/ Bluetooth Intercom/Mesh Intercom/FM Radio/Music	Check battery	“Hey Sena, Check Battery”
	Volume Up	“Hey Sena, Volume Up”
	Volume Down	“Hey Sena, Volume Down”
	Phone Pairing	“Hey Sena, Phone Pairing”
	Bluetooth Intercom Pairing	“Hey Sena, Pairing Intercom”
	Start/End each Bluetooth Intercom	“Hey Sena, Intercom [One, Two, Three]”
Standby/ Bluetooth Intercom/FM Radio/Music	Turn on Mesh Intercom	“Hey Sena, Mesh On”
Mesh Intercom	Turn off Mesh Intercom	“Hey Sena, Mesh Off”
	Mesh Grouping	“Hey Sena, Mesh Grouping”
	Switch to Open Mesh	“Hey Sena, Open Mesh”
	Switch to Group Mesh	“Hey Sena, Group Mesh”
	End the Bluetooth Intercom and Mesh Intercom	“Hey Sena, End Intercom”
Standby/ Bluetooth Intercom/Mesh Intercom	Play Music	“Hey Sena, Play Music”
Standby/ Intercom/Mesh Intercom/Music	Turn on FM radio	“Hey Sena, FM Radio On”

Mode Status	Function	Voice Command
Music/FM Radio	- FM - Next Preset - Music - Next Track	"Hey Sena, Next"
	- FM - Previous Preset - Music - Previous Track	"Hey Sena, Previous"
Music	Pause Music	"Hey Sena, Stop Music"
FM Radio	Turn off FM Radio	"Hey Sena, FM Radio Off"
Answer an Incoming Call		"Answer"
Ignore an Incoming Call		"Ignore"

Note:

- You can set a language to another language by using the **Language** feature on the **Sena Motorcycles App**.
- If you set a language that does not support voice commands, the voice command will work only with English commands.
- You can see the another language’s voice command list on the **Sena Motorcycles App**.
- **Voice command** performance may vary based on the environmental conditions.

14. FUNCTION PRIORITY

- (highest)

Mobile phone

Mesh Intercom/Bluetooth Intercom

Music sharing via Bluetooth stereo music

FM radio
- (lowest)

Bluetooth stereo music

A lower-priority function gets interrupted by a higher-priority function. For example, stereo music will be interrupted by an **Intercom Conversation**; an **Intercom Conversation** will be interrupted by an incoming mobile phone call.

15. FIRMWARE UPGRADES

15.1 Wi-Fi-Enabled for Automatic Firmware Update

You can automatically install any available firmware updates to your Bluetooth system via a wireless network.

Built-in Wi-Fi in the Bluetooth System

- IEEE 802.11 b/g/n
- Working distance: Within 10 m

15.1.1 Connecting to the Bluetooth System

Firmware will be upgraded automatically when the **Bluetooth system** is charging. If you want to upgrade the firmware, you must first change the settings in the **Sena Motorcycles App**.

1. Connect the helmet to the USB charger (5 V/1 A), the **Bluetooth system** will power off automatically.
2. The **built-in Wi-Fi** automatically turns on and the red LED flashes quickly.

Note:

- Any 3rd party USB charger (5 V/1 A) can be used for firmware updates if the charger is approved by either the FCC, CE, or IC.
- Do not connect the **Bluetooth system** to a USB port on your PC to update the firmware.
- Do not disconnect the **USB Cable** while updating the firmware. Doing so may damage the product.
- Do not turn the **Bluetooth system** on while updating the firmware. Doing so may damage the product.


15.1.2 Connection Setup

- 1. Open the **Sena Motorcycles App**.
- 2. Tap the Menu button (⚙️) in the top-right corner of the screen and select **Update via WiFi**.
- 3. Follow the **instructions** on the **Sena Motorcycles App** to connect the **built-in Wi-Fi** to a Wi-Fi access point.

Note: To change the Wi-Fi access point, execute **Wi-Fi Reset** then repeat the steps above.


15.1.3 LED Description

Charging & Wi-Fi Status LED

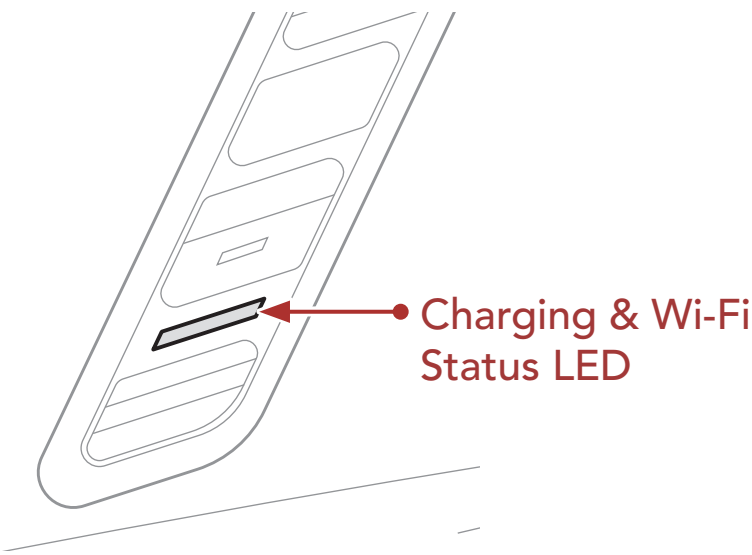


- | | |
|--|--|
|  | Charging & disconnected from a Wi-Fi access point |
| 
FAST BLINKING | Charging & searching for a Wi-Fi access point |
| 
BLINKING | Charging & connected to a Wi-Fi access point |
|  | Fully charged & disconnected from a Wi-Fi access point |
| 
FAST BLINKING | Fully charged & searching for a Wi-Fi access point |
| 
BLINKING | Fully charged & connected to a Wi-Fi access point |

Firmware Upgrade Status LED

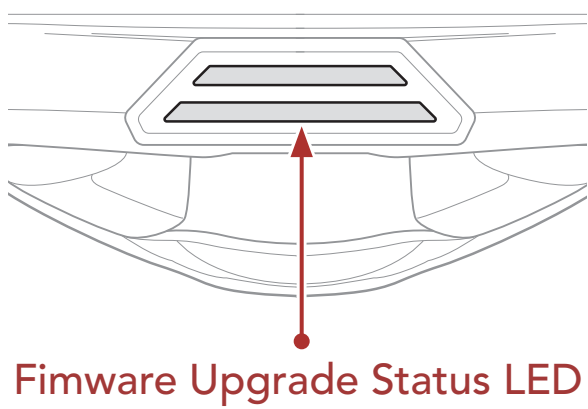


Upgrading Firmware

1 and 2 are repeated: 1 2

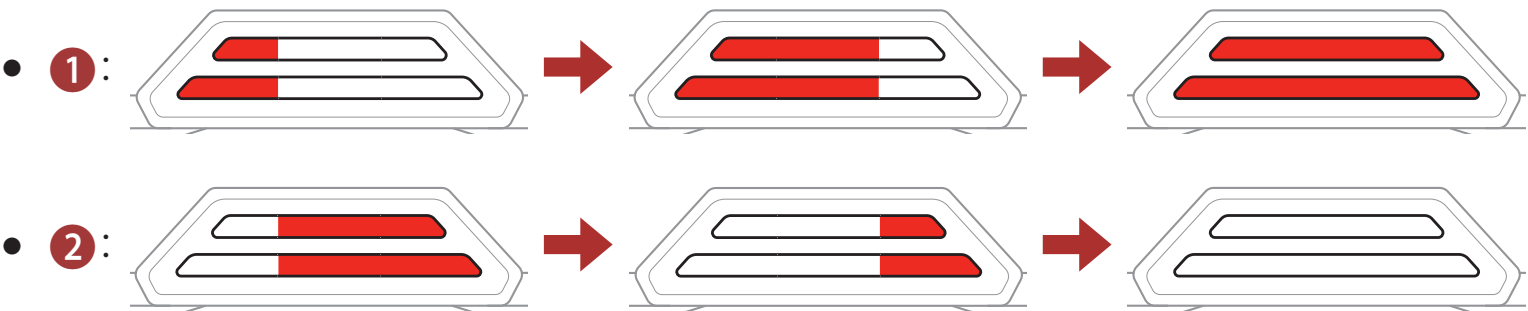

Firmware Upgrade Completed

1 and 2 are repeated: 1 2

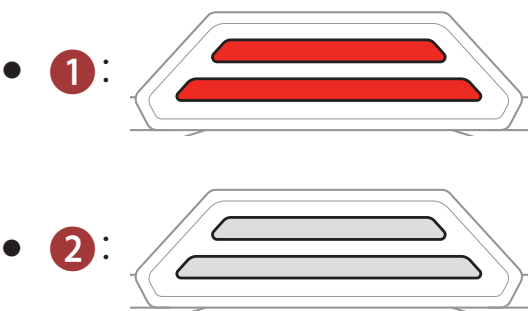

15.1.4 Wi-Fi Reset

The **built-in Wi-Fi** setting will be restored to the factory default settings, which include the **Wi-Fi configuration setup**, the **firmware setup**, and the **language setup**.




Note: Wi-Fi Reset is only possible when the Bluetooth system is being charged.



16. CONFIGURATION SETTING

16.1 Bluetooth System Configuration Menu


Accessing the Configuration Menu

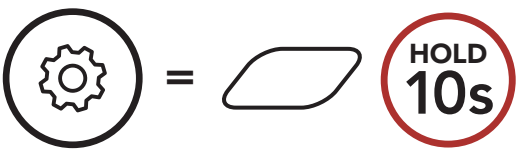

Navigating Between Menu Options

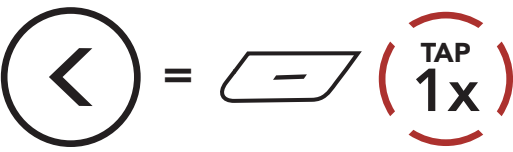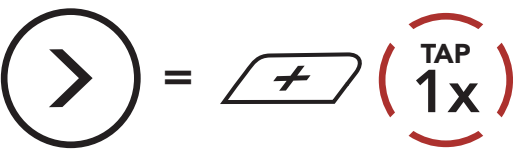

Execute Menu Options

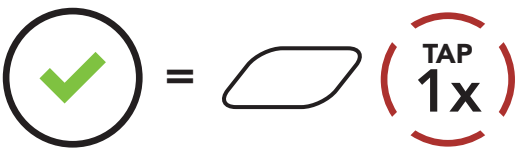

Bluetooth System Configuration Menu

Voice Configuration Menu	Tap the Center Button
Phone Pairing	None
Second Mobile Phone Pairing	None
Phone Selective Pairing	None
Media Selective Pairing	None
GPS Pairing	None
Delete All Pairings	Execute
Remote Control Pairing	Execute
Universal Intercom Pairing	Execute
Factory Reset	Execute
Exit	Execute

16.1.1 Delete All Pairings

You can delete all Bluetooth pairing information of the Bluetooth system.

16.1.2 Remote Control Pairing

You can remotely control the Bluetooth system using **Sena Remote Control devices** (sold separately).

1. Turn on the Bluetooth system and the Remote Control device.
2. Execute **Remote Control Pairing**.
3. Enter pairing mode in the Remote Control device. The Bluetooth system will automatically connect with the Remote Control device in pairing mode.

16.2 Software Configuration Setting

You can change the settings of the Bluetooth system through the **Sena Motorcycles App**.

16.2.1 Language

You can select the device language. The selected language is maintained even when the Bluetooth system is rebooted.

16.2.2 Mesh Reach-Out (Default: Disable)

When the **Mesh Reach-Out** is enabled, a Mesh Reach-Out request message can be sent or received. If the **Mesh Reach-Out** is disabled, a Mesh Reach-Out request message cannot be sent or received.

16.2.3 Equalizer (Default: Music Balance)

Increase or decrease the decibel level of different frequency ranges of audio.

- **Music Balance** will adjust frequency response that gives the most natural balance between lows, mids, and highs.
- **Music Enhanced** will lower midrange frequencies slightly.
- **Voice** will increase midrange frequencies of the human voice and cut environmental noise for better clarity with voice communication.
- **Bass Boost** will increase the bass range of audio (130 Hz and below).
- **Treble Boost** will increase the high range of audio (6 kHz and above).

16.2.4 Audio Boost (Default: Enable)

Audio Boost increases the overall maximum volume. If **Audio Boost** is enabled, Equalizer will not be effective at the maximum volume and only work below the maximum volume. If **Audio Boost** is disabled, Equalizer will work across all volume ranges.

16.2.5 VOX Phone (Default: Enable)

If this feature is enabled, you can answer incoming calls by voice. When you hear a ringtone for an incoming call, you can answer the phone by saying a word such as **"Hello"** loudly or by blowing air into the microphone. **VOX Phone** is temporarily disabled if you are connected to intercom. If this feature is disabled, you have to tap the **Center Button** to answer an incoming call.

16.2.6 VOX Intercom (Default: Disable)

If this feature is enabled, you can initiate an intercom conversation with the last connected intercom friend by voice. When you want to start intercom, say a word such as **"Hello"** loudly or blow air into the microphone. If you start an intercom conversation by voice, the intercom terminates automatically when you and your intercom friend remain silent for **20 seconds**. However, if you manually start an intercom conversation by tapping the **Center Button**, you have to terminate the intercom conversation manually. However, if you start the intercom by voice and end it manually by tapping the **Center Button**, you will not be able to start intercom by voice temporarily. In this case, you have to tap the **Center Button** to restart the intercom. This is to prevent repeated unintentional intercom connections by strong wind noise. After rebooting the Bluetooth system, you can start intercom by voice again.

16.2.7 VOX Sensitivity (Default: 3)

Vox Sensitivity can adjust the sensitivity of Vox Phone and Vox Intercom. **Level 5** is the highest sensitivity setting and **level 1** is the lowest.

16.2.8 HD Intercom (Default: Enable)

HD Intercom enhances the two-way intercom audio from normal quality to HD quality. **HD Intercom** will become temporarily disabled when you enter into a multi-way intercom. If this feature is disabled, the two-way intercom audio will change to normal quality.

Note:

- The intercom distance of **HD Intercom** is relatively shorter than that of normal intercom.
- **HD Intercom** will become disabled temporarily when **Bluetooth Intercom Audio Multitasking** is enabled.

16.2.9 HD Voice (Default: Enable)

HD Voice allows you to communicate in high-definition during phone calls. This feature increases the quality so that the audio will be crisp and clear during phone call conversations. If this feature is enabled, incoming phone calls will interrupt intercom conversations and audio from the SR10 will not be heard during intercom conversations. **Three-Way Conference Phone Call with Intercom Participant** will not be available if **HD Voice** is enabled.

Note:

- Refer to the manufacturer of your Bluetooth device that will be connected to the Bluetooth system to see if it supports **HD Voice**.
- **HD Voice** is active only when **Bluetooth Intercom Audio Multitasking** is disabled.

16.2.10 Bluetooth Intercom Audio Multitasking (Default: Disabled)

Audio Multitasking (Bluetooth Intercom Audio Multitasking and Mesh Intercom Audio Multitasking) allows you to have an intercom conversation while simultaneously listening to music, FM radio, or GPS instructions. The overlaid audio is played in the background with reduced volume whenever there is an intercom conversation and will return to normal volume once the conversation is finished.

The **Mesh Intercom Audio Multitasking** feature is **always on**.

Note:

- For **Bluetooth Intercom Audio Multitasking** to work properly, you need to power the Bluetooth system off and on. **Please restart the Bluetooth system.**
- **Bluetooth Intercom Audio Multitasking** will be activated during two-way intercom conversations with a Bluetooth system that also supports this feature.
- Some GPS devices may not support this feature.
- The **Audio Multitasking** feature can be configured through the **Intercom-Audio Overlay Sensitivity** and the **Audio Overlay Volume Management settings**.

16.2.11 Intercom-Audio Overlay Sensitivity (Default: 3)

The music, FM radio and GPS volume will be lowered to play in the background if you talk over the intercom while the overlaid audio is playing. You can adjust the intercom sensitivity to activate this background audio mode. **Level 1** has the lowest sensitivity and **level 5** has the highest sensitivity.

Note: If your voice is not louder than the sensitivity of the selected level, the overlaid audio will not be lowered.

16.2.12 Audio Overlay Volume Management (Default: Disable)

The music, FM radio and GPS overlaid audio reduces in volume whenever there is an ongoing intercom conversation. If **Audio Overlay Volume Management** is enabled, the volume level of the overlaid audio will not be reduced during an intercom conversation.

16.2.13 Smart Volume Control (Default: Disable)

Enabling **Smart Volume Control** automatically changes the level of the speaker volume based on the level of the environment noise. You can enable it by setting the sensitivity to **low**, **medium** or **high**.

16.2.14 Sidetone (Default: Disable)

Sidetone is audible feedback of your own voice. It helps you to naturally speak at the correct level according to varying helmet noise conditions. If this feature is enabled, you can hear what you are speaking during an intercom conversation.

16.2.15 Voice Assistant (Default: Enable)

If **Voice Assistant** is enabled, you can wake up Siri or Google Assistant using a voice command, such as "Hey Siri" or "Hey Google." If you do not want to wake up Siri or Google Assistant with your voice, disable this feature.

16.2.16 Voice Prompt (Default: Enable)

You can disable **Voice Prompts** by software configuration settings, but the following voice prompts are always on.

- Bluetooth system configuration settings menu, battery level indicator, speed dial, FM radio functions

16.2.17 RDS AF Setting (Default: Disable)

Radio Data System (RDS) Alternative Frequency (AF) Setting allows a receiver to re-tune to the second frequency location when the first signal becomes too weak. With RDS AF enabled on the receiver, a radio station with more than one frequency can be used.

16.2.18 FM Station Guide (Default: Enable)

When **FM Station Guide** is enabled, FM station frequencies are given by voice prompts as you select preset stations. When **FM Station Guide** is disabled, the voice prompts on FM station frequencies will not be given as you select preset stations.

16.2.19 Advanced Noise Control™ (Default: Enable)

When **Advanced Noise Control** is enabled, the background noise is reduced during an intercom conversation. When it is disabled, the background noise is mixed with your voice during intercom.

16.2.20 Region Selection

You can select the proper FM frequency range for your location. Using the region setting, you can optimize the seek function to avoid unnecessary frequency ranges.

Region	Frequency range	Step
Worldwide	76.0 ~ 108.0 MHz	± 100 kHz
North America, South America and Australia	87.5 ~ 107.9 MHz	± 200 kHz
Asia and Europe	87.5 ~ 108.0 MHz	± 100 kHz
Japan	76.0 ~ 95.0 MHz	± 100 kHz


17. TROUBLESHOOTING

Please visit sena.com for more troubleshooting information.

17.1 Fault Reset

When the Bluetooth system is not working properly, you can easily reset the unit:

- 1. Locate the **Pinhole Fault Reset Button** above the **Magnetic DC Power Charging Port**.
- 2. Gently insert a paper clip into the hole and press the **Pinhole Fault Reset Button** with light pressure.

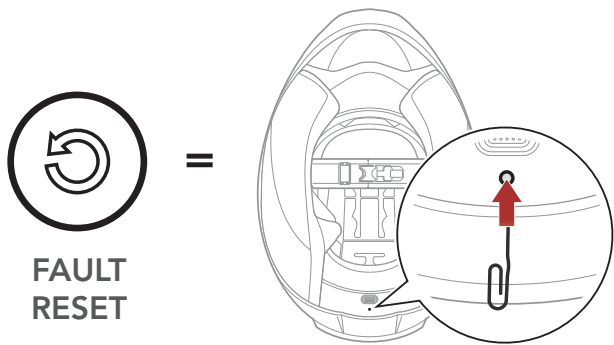

- 3. The Bluetooth system will shut down.

Note: Fault Reset will not restore the Bluetooth system to factory default settings.

17.2 Factory Reset

To erase all of your settings and start fresh, the Bluetooth system can be restored to factory default settings using the **Factory Reset** feature.

- 1. = **HOLD 10s** → "Configuration menu"
- 2. = **TAP 2x** → "Factory reset"
- 3. = **TAP 1x** → "Headset reset, good-bye"

18. MAINTENANCE AND CARE

18.1 Outer Shell

Use a soft cloth and a small amount of water to remove bugs from the exterior.

Note: Never use gasoline, diesel fuel, thinners or solvents to clean the helmet. These substances can cause serious damage to the helmet, even though the resulting damage may not be visible. The full safety function of the helmet can then no longer be guaranteed.

18.2 Inner Lining

The inner lining of the helmet is completely removable. Its headliner can be washed by hand using mild soap at a maximum temperature of 30°C (86°F). Allow the lining to dry at room temperature.

18.3 Storing the Helmet

Store the helmet in a dry, dark, well-ventilated location, out of the reach of children and animals. Always position the helmet so that it cannot fall to the floor. Damage that occurs in this way is not covered by the warranty.



Copyright 2025 Sena Technologies, Inc.
All rights reserved.

© 1998–2025 Sena Technologies, Inc. All rights reserved.

Sena Technologies, Inc. reserves the right to make any changes and improvements to its product without providing prior notice.

Sena™ is a trademark of Sena Technologies, Inc. or its subsidiaries in the USA and other countries.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Sena is under license.

Sena Technologies, Inc.
152 Technology Drive, Irvine, CA 92618